





CSV1 300 SPECIFICATIONS

Model Number	CSV1-300-0103	CSV1-300-0105
Capacity Range (pF)	8-300	8-300
Voltage (kV) Peak		
Test	3.0	5.0
Working	1.8	3.0
Current Amps (RMS) Max.	30	40
Type	Ceramic	Ceramic
Nominal Dimensions		
Length (in. / mm)	5.35 / 135.89	5.35 / 135.89
Diameter (in. / mm)	2.38 / 60.33	2.38 / 60.33
Torque (in Lbs.) Max.	17	17
Direct Pull (Lbs.) Max.	50	50
Weight (Nominal)	1 lb. 2 oz.	1 lb. 2 oz.
NOTES: <i>Mounting:</i> Use flange FMOD on fixed end. Soldered-on flange on variable end.		

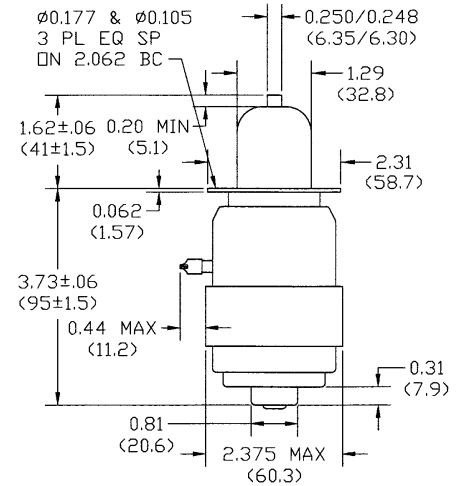

CAPACITY vs TURNS
Typical Data

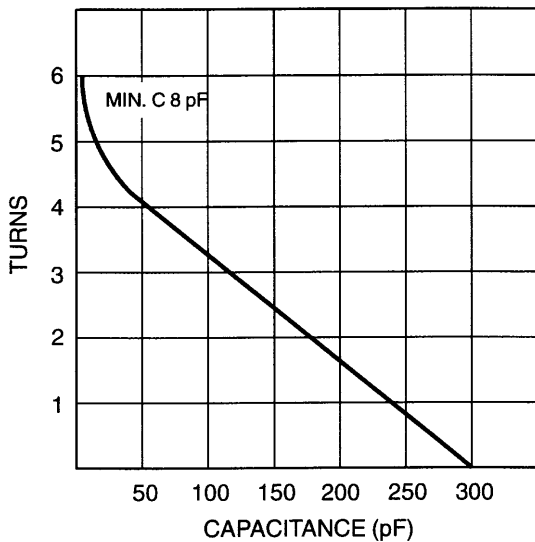

CONTINUOUS RMS AMPERES vs FREQUENCY
(at 3kV PEAK WORKING VOLTAGE)

