



150 Dodd Street SE
Marietta, GA. 30060

Phone: 770-973-6251
Fax: 678-401-3854

Email: info@mgs4u.com
Website: www.mgs4u.com

BNC female to BNC male Right Angle Adapter



Technical Data Sheet

This BNC female to BNC male right angle adapter is one of several thousand RF products available from Max-Gain Systems, Inc. This adapter is an in-series coaxial adapter.

This adapter is made from a Solid Brass body that is precision machined and plated with Nickel for superior performance and value. This BNC female to BNC male adapter has a Delrin dielectric and a gold plated brass center pin. The BNC female side's tabs or "bayonets" accepts the BNC male for quick and reliable connections and disconnections. The BNC male side accepts the BNC female tabs or "bayonets" for quick and reliable connections and disconnections.

Material Specifications

BNC female to BNC male Adapter		Part Number 7048-RA
Description	Material	Plating
Shell	Brass	Nickel
Center Pin	Brass	Gold
Insulator	PTFE	White
Body	Brass	Nickel

Mechanical Specifications


Size	Dimension
Length	1.07 in (27.4 mm)
Width	0.93 in (23.6 mm)
Height	0.57 in (14.50 mm)
Weight	0.42 oz (12 g)

Environmental Specifications

Temperature	Spec
Operating Range	-65 to +165 deg C

Compliance Certifications (see product page for current documentation)

Availability Click the following link (or enter part number in the “SEARCH” bar at the top of any page of the website) to obtain additional part information including price, inventory and certifications: <https://mgs4u.com/product/bnc-female-to-bnc-male-right-angle-adapter-7048-ra/>

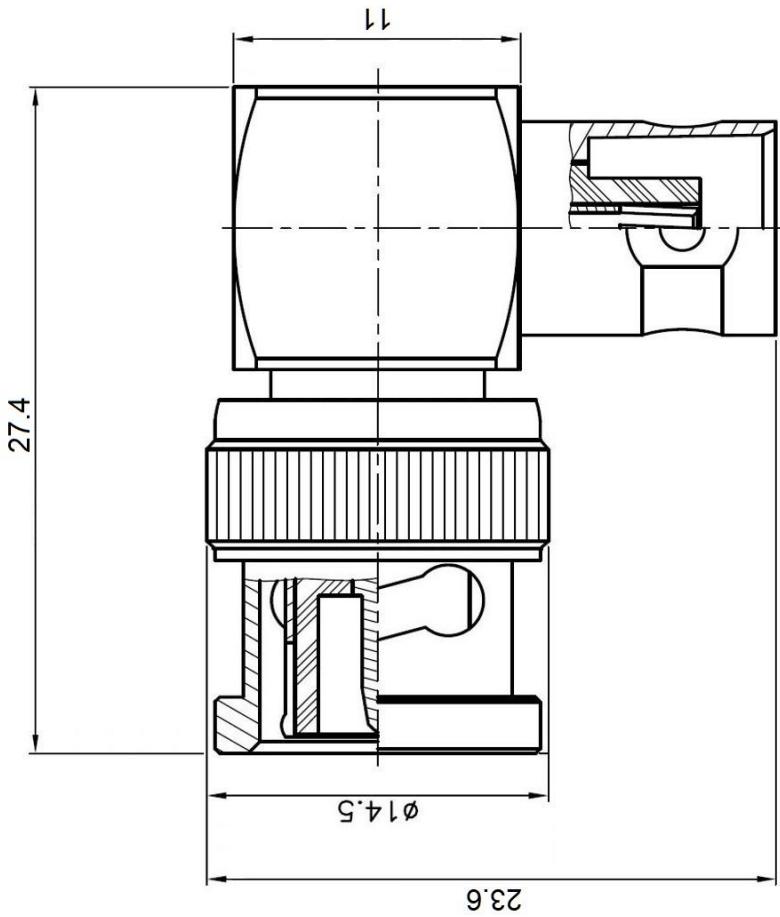

MGS MAX-GAIN SYSTEMS, INC.

BNC female to BNC male Right Angle
Max-Gain Systems, Inc.
150 Dodd Street SE, Marietta, GA. 30060
Phone: (770) 973-6251 Fax: (678) 401-3854
Website: www.mgs4u.com | E-Mail: sales@mgs4u.com

NO.	DESCRIPTION	MATERIAL	FINISH	SCALE:	DATE
SHELL	BRASS	NICKEL			
PIN	BRASS	GOLD			
INSULATOR	DELIN	WHITE			
BODY	BRASS	NICKEL			