
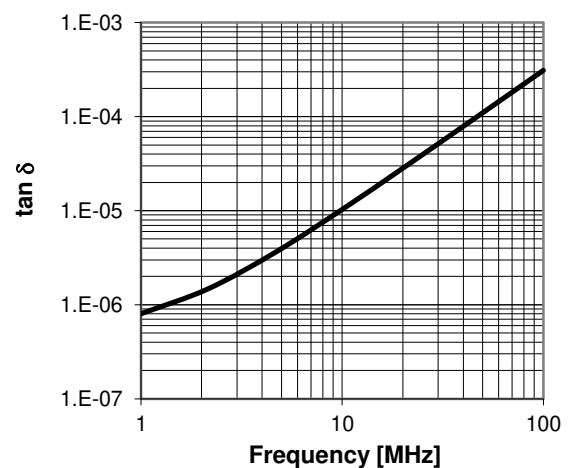
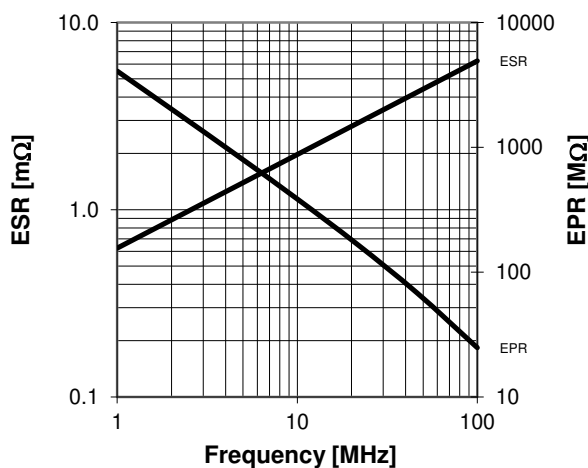
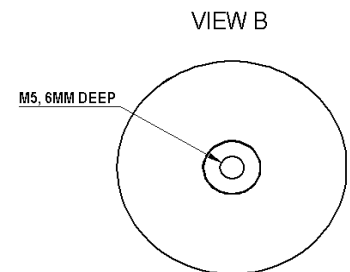

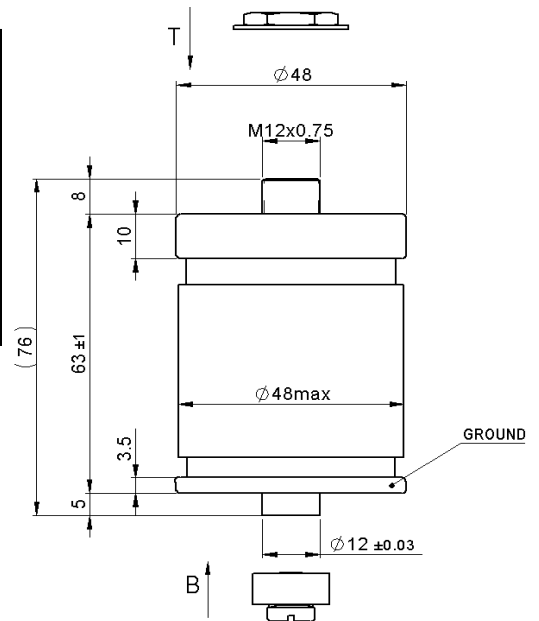


**CTMN-74DAC/30-VK**

Specifications	
Capacitance $C_{max}$ (nominal)	79 pF
Capacitance $C_{min}$ (nominal)	69 pF
Voltage (Peak Test $U_{pt}$ / Peak Working $U_{pw}$ )	30 kV / 18 kV
Max. Current $I_{max}$ at 13.56 MHz with	85 Arms
Conduction Cooling	20 W
Capacitance per turn	3 pF
Net Weight	0.6 kg
Torque	<0.2 Nm

$I_{max}$  at 25°C ambient and 125°C surface temp. for convection and conduction (20W) cooling

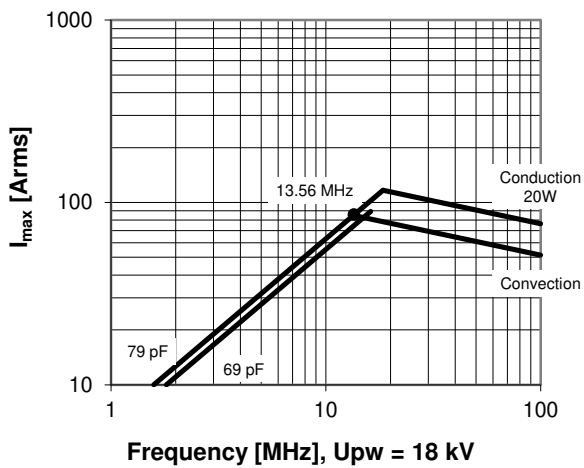

Special Features:
RoHS Compliant

Subject to change without prior notice

Note: Technical information in Service Bulletin SB-52 must be considered