




# CFMN-100DAC/30-AF-G

Old Type Designation: MC2C-100E



## Specifications

Capacitance $C_{max}$ (nominal)	100 pF
Voltage (Peak Test $U_{pt}$ / Peak Working $U_{pw}$ )	30 kV / 18 kV
Capacitance Tolerance	5%
Max. Current $I_{max}$ at 13.56 MHz with	108 Arms
Conduction Cooling	50 W
Net Weight	0.52 kg

$I_{max}$  at 25°C ambient and 125°C surface temp. for convection and conduction (50 W) cooling

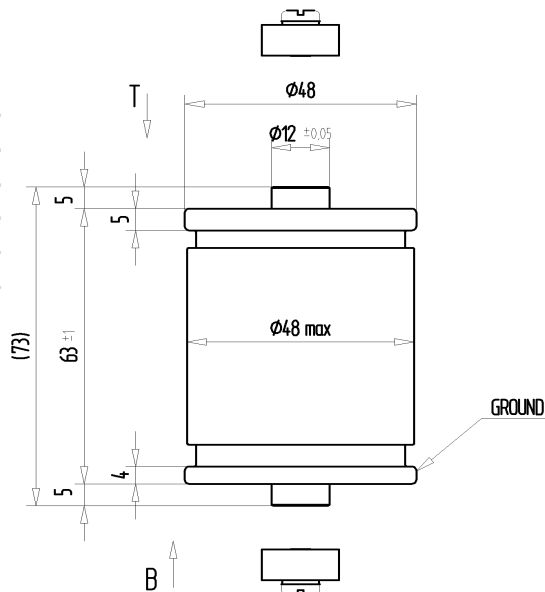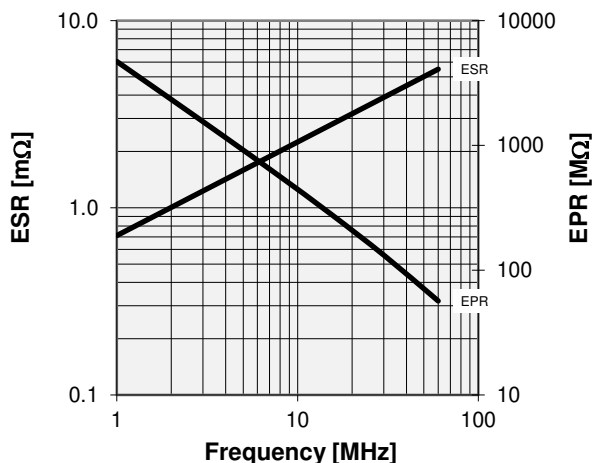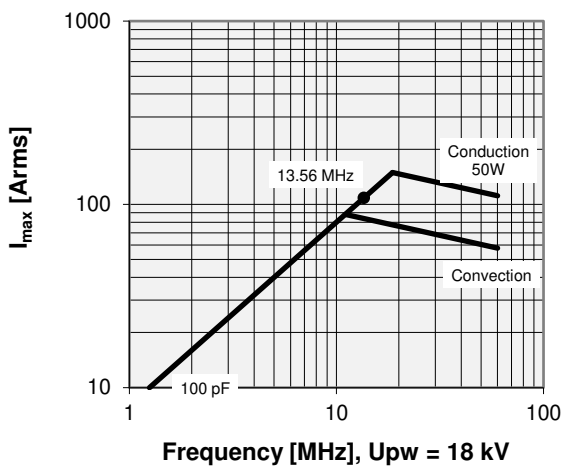

MOUNTING KITS 058-070 ENCLOSED

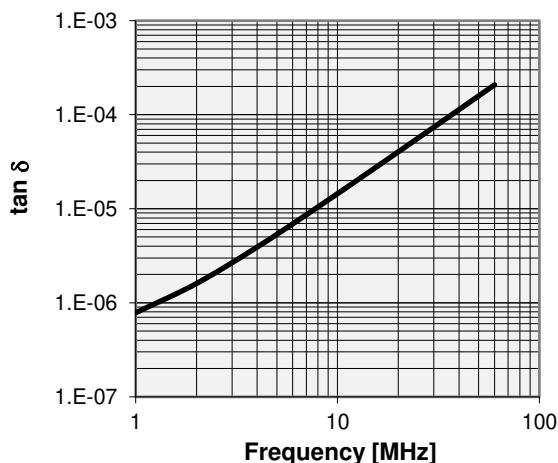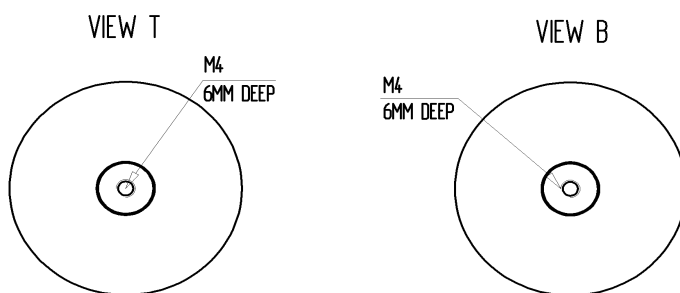

**Special Features:**  
Capacity Tolerance 5%, RoHS Compliant

Note:  
Technical information in Service Bulletin  
SB-52 must be considered  
Subject to change without prior notice