


ENVELOPE / ASSEMBLY DRAWING

SPECIFICATION CONTROL DRAWING


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO MAX-GAIN SYSTEMS, INC.
 ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED.
 ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

REV	DESCRIPTION	DATE	APPROVED

ALTERNATE STRIPPING REQUIRED WHEN USING REDUCERS

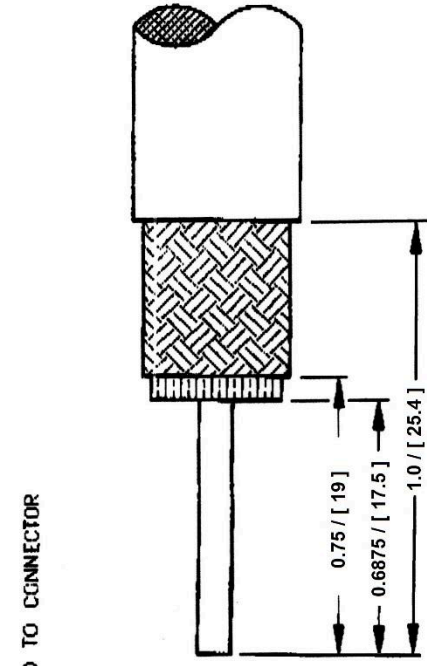

SUGGESTED STRIPPING INSTRUCTIONS

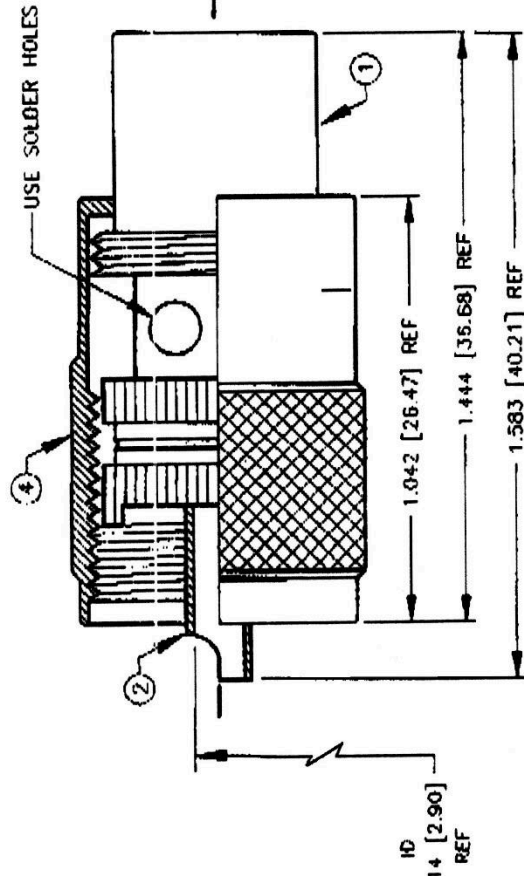

SPECIFICATIONS:

- VOLTAGE RATING: 500 VOLTS RMS
- IMPEDANCE: NON CONSTANT
- FREQUENCY RANGE: 0-300
- (A) FOR RG-8, 8A, 213/U
- (B) FOR RG-9, 9A, 9B
- (C) FOR BELDEN 9913, 9914, RG-8/U TYPE, RG-393/U & TIMES LMR-400
- W/7508-S REDUCER:
- (D) FOR RG-58, 58A, 58C, 141, 141A, 400/U
- (E) FOR RG-55, 55A, 55B, 142, 142A, 142B & 223/U
- W/7507-S REDUCER:
- (F) FOR RG-59, 59A, 59B, 62, 62A, 620 71, 140 & 210/U
- (G) FOR ANTENNA SPECIALIST K214 & PRO-FLEX 800, TIMES AA3095 & COMM/SCOPE 2275 & 2279 CABLE
- (H) FOR RG-8/X & 30/U, BELDEN 9258, TIMES LMR-240 & LMR-240 ULTRAFLEX
- W/7506-S REDUCER:
- (I) FOR RG-174, RG-178, RG-188, RG-196, LMR-100, LMR-110, LMR-100A & BELDEN 8216

DIMENSIONS ARE IN INCHES AND [MILLIMETERS]	
UNLESS OTHERWISE NOTED TOLERANCES ARE:	
DECIMALS	DIAMETER

ITEM	DESCRIPTION	QTY	MATERIAL	FINISH	APPROVALS	DATE
4	SHELL	1	BRASS	SILVER		
3	DIELECTRIC	1	PIPE	WHITE		
2	PIN	1	BRASS	SILVER		
1	BODY	1	BRASS	SILVER		



Max-Gain Systems, Inc.
 150 Dodd Street SE, Marietta, GA. 30060
 Phone: (770) 973-6251 | Fax: (678) 401-3854
 Website: www.mgs4u.com | E-Mail: sales@mgs4u.com