






CFMN-50DAC/30-AF-H

Specifications

Capacity C_{max} (nominal)	50 pF
Voltage (Peak Test U_{pt} / Peak Working U_{pw})	30 kV / 18 kV
Capacity Tolerance	2%
Max. Current I_{max} at 13.56 MHz with	54 Arms
Conduction Cooling	50 W
Net Weight	0.38 kg

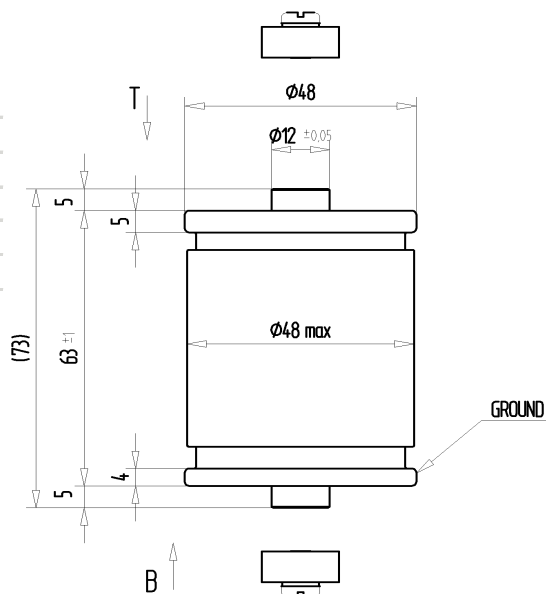

I_{max} at 25°C ambient and 125°C surface temp. for convection and conduction (50 W) cooling

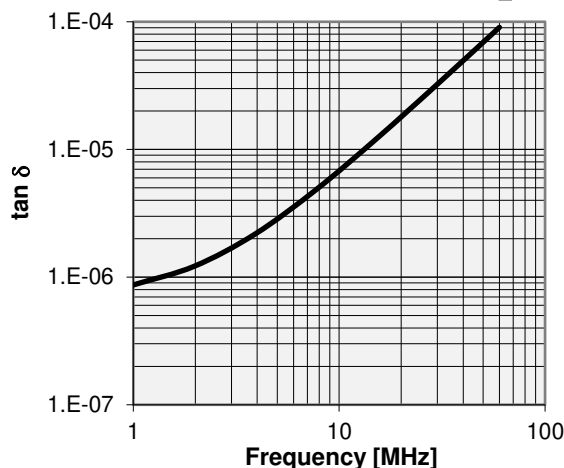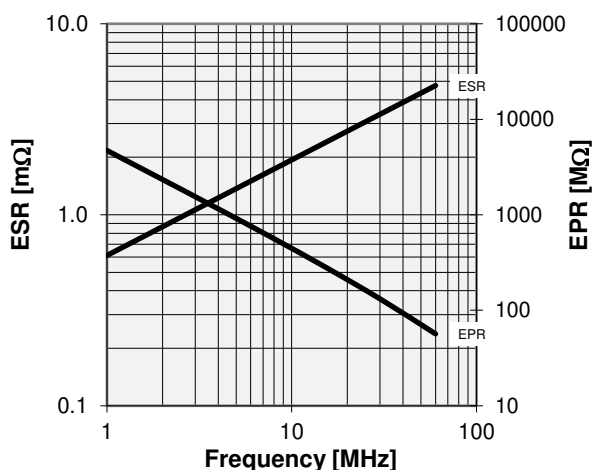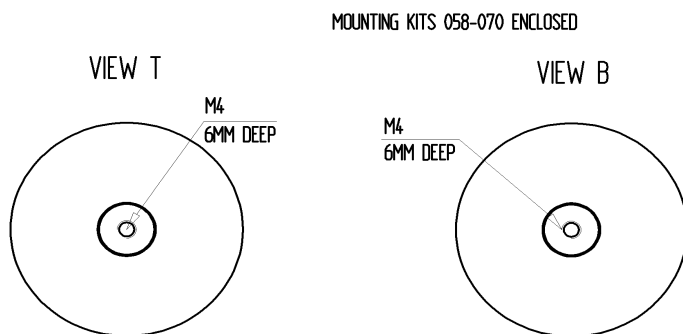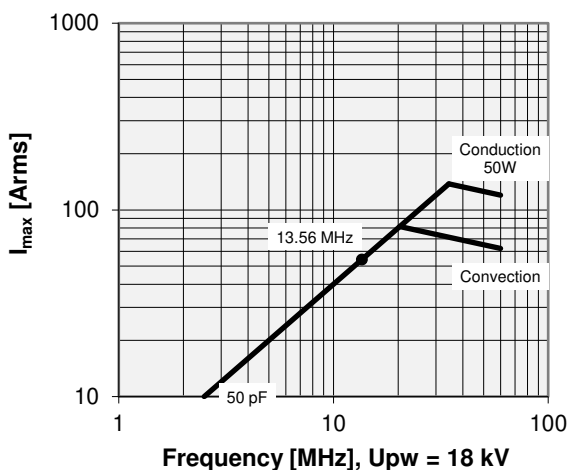

Special Features:
 Special C-Curve / Special Capacity Tolerance,
 RoHS Compliant

Note:
 Technical information in Service Bulletin
 SB-52 must be considered
 Subject to change without prior notice