
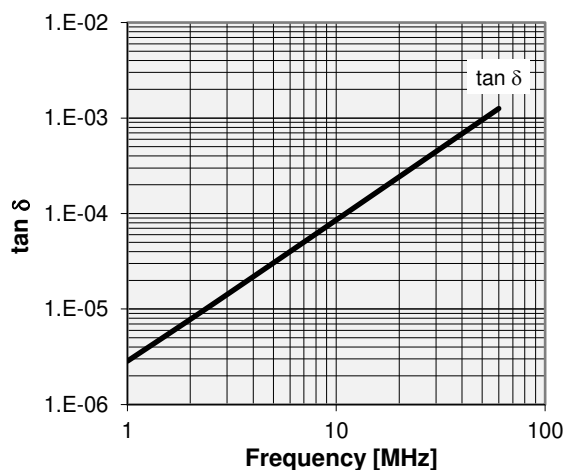
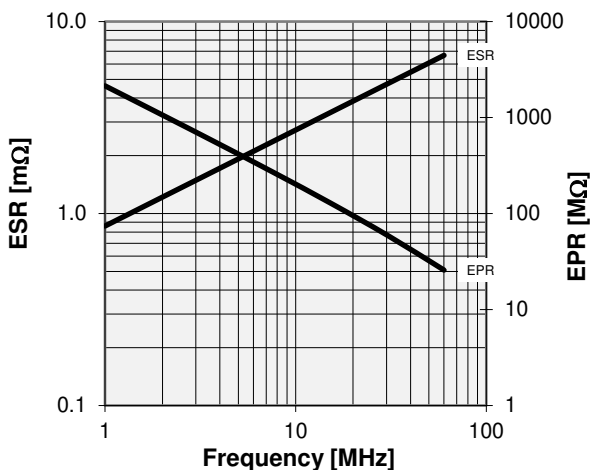


CVHE-500AC/15-BUAA-A

Turns	Nominal Capacitance [pF]	Tolerance
-0.2	50.0	10%
0.0	52.8	0%
4.0	143.6	10%
8.0	236.1	10%
12.0	330.3	10%
16.0	424.6	10%
19.2	500.0	10%

Slamindex at 50 ± 1 pF at -0.2 ± 0.05 turns
 Mechanical stop at > 500 pF at ~ 19.4 turns

Self inductance and resonance frequency

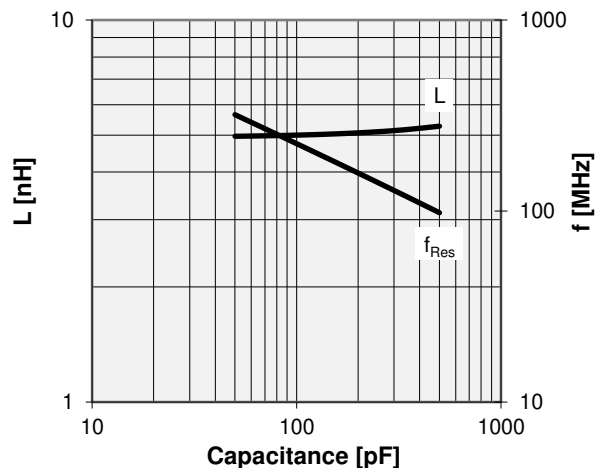

Special Features:
Slam Index

Note:
 Technical information in Service Bulletin
 SB-52 must be considered
 Subject to change without prior notice