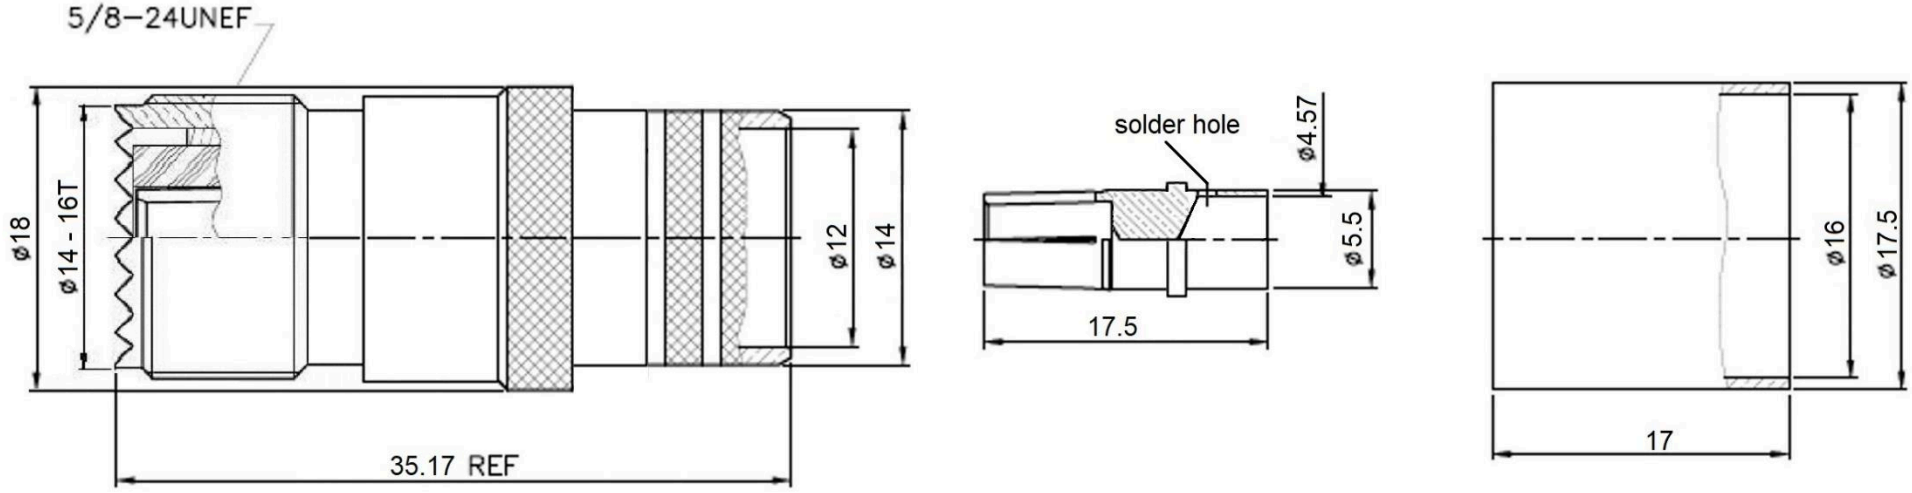





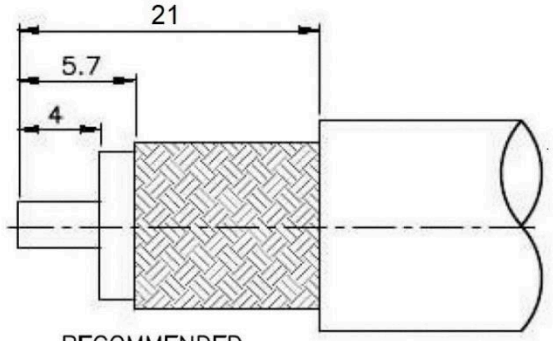


RECOMMENDED
CABLE STRIPPING DIM'S

| NO. | DESCRIPTION | MATERIAL | FINISH | QTY |
|---|---|---|---|---|
| | FERRULE | BRASS | SILVER | 1 |
| | PIN | BRASS | SILVER | 1 |
| | INSULATOR | TEFLON | WHITE | 1 |
| | BODY | BRASS | SILVER | 1 |

UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5–5 = ±0.2
5–30 = ±0.4
30–120 = ±0.6
120–315 = ±1
315–1000 = ±1.6
1000–2000 = ±2.4

UNIT: mm

SCALE: -

PART NO DATE

APPROVED DATE

CHECKED DATE

DRAWN DATE

MGS MAX-GAIN SYSTEMS, INC.

Max-Gain Systems, Inc.
150 Dodd Street SE, Marietta, GA. 30060
**Phone:** (770) 973-6251 | **Fax:** (678) 401-3854
**Website:** www.mgs4u.com | **E-Mail:** sales@mgs4u.com

TITLE: UHF Female Crimp Connector 0.590 Inch OD Coax

DRAWING NO: 7506-UHF-600

FILE NO : .