
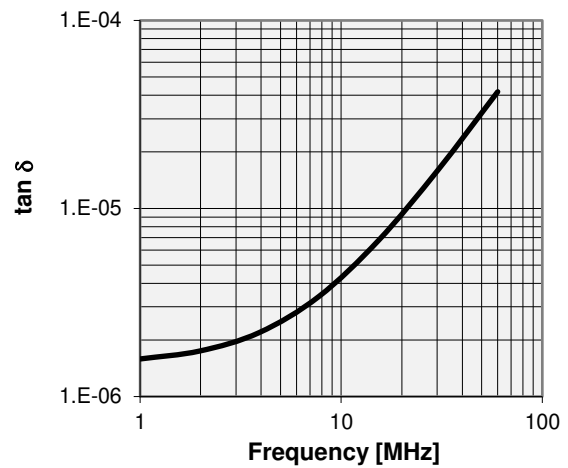
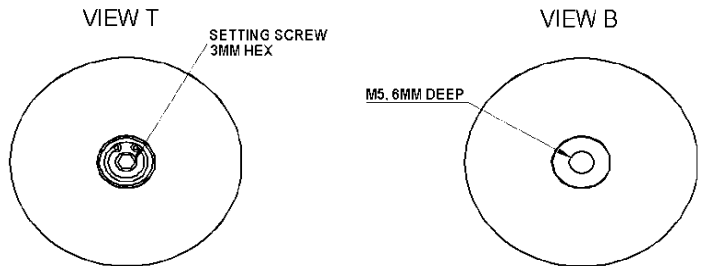
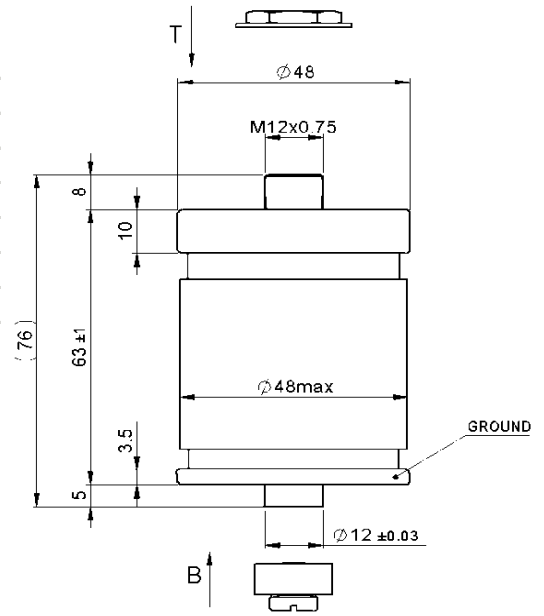
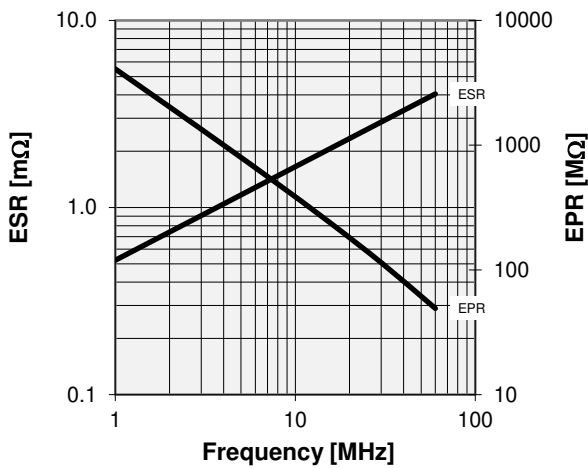


# CTMN-21DAC/30-VK

## Specifications

Capacitance $C_{max}$ (nominal)	26 pF
Capacitance $C_{min}$ (nominal)	16 pF
Voltage (Peak Test $U_{pt}$ / Peak Working $U_{pw}$ )	30 kV / 18 kV
Max. Current $I_{max}$ at 13.56 MHz with	28 Arms
Conduction Cooling	20 W
Capacitance per turn	3 pF
Net Weight	0.45 kg
Torque	<0.2 Nm

$I_{max}$  at 25°C ambient and 100°C surface temp. for convection and conduction (10W) cooling

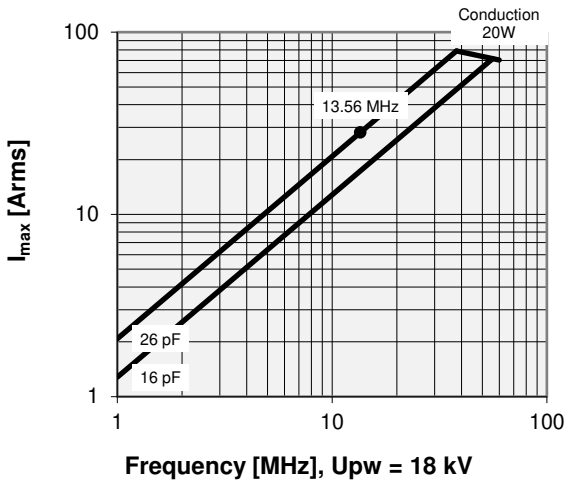

<b>Special Features:</b>
RoHS Compliant

Note:  
 Technical information in Service Bulletin  
 SB-52 must be considered  
 Subject to change without prior notice