



150 Dodd Street SE
Marietta, GA. 30060

Phone: 770-973-6251
Fax: 678-401-3854

Email: info@mgs4u.com
Website: www.mgs4u.com

Large Fender Gasket for UHF female (SO-239) Bulkhead Connectors



Technical Data Sheet

Large Silicone Fender Gasket with 5/8 inch ID used with N-Female and UHF-Female bulkhead connectors and adapters. Large fender gasket for UHF and Type N female bulkhead connectors.

Be sure to check out our Large Fender Washers designed to work directly with these Large Fender Gaskets AND our Large Panel Nuts.

Material Specifications

Large Fender Gasket for UHF Female (SO-239) Bulkhead Connectors P/N 7518-L-GASKET

| Description | Material | Plating |
|-------------|----------|---------|
| Body | Silicone | Black |

Mechanical Specifications


| Size | Dimension |
|--------|------------------|
| Length | 0.06 in (1.5 mm) |
| Width | 1.38 in (35 mm) |
| Height | 1.38 in (35 mm) |
| Weight | 0.02 oz (.5 g) |

Environmental Specifications

| Temperature | Spec |
|-----------------|-------------------|
| Operating Range | -65 to +165 deg C |

Compliance Certifications (see product page for current documentation)

Availability Click the following link (or enter part number in the “SEARCH” bar at the top of any page of the website) to obtain additional part information including price, inventory and certifications: <https://mgs4u.com/product/large-fender-gasket-for-uhf-female-so-239-bulkhead-connectors-7518-l-gasket/>

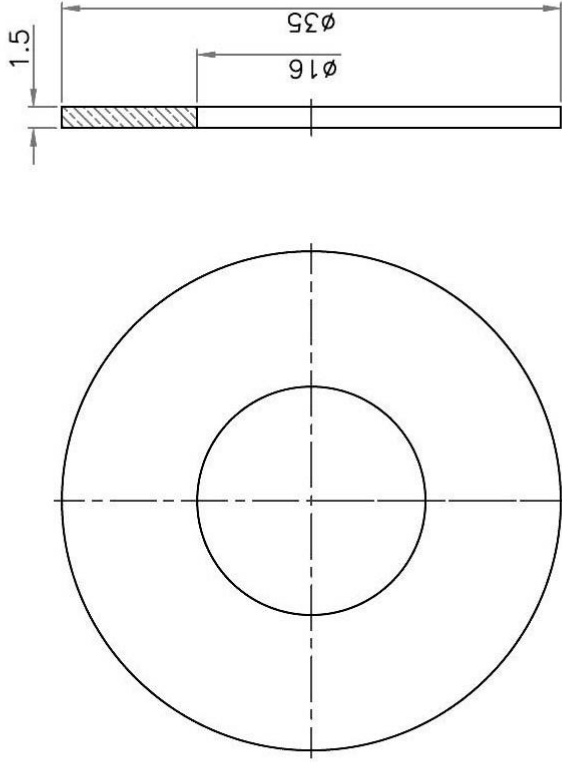

MGS MAX-GAIN SYSTEMS, INC.

Max-Gain Systems, Inc.
 150 Dodd Street SE, Marietta, GA, 30060
 Phone: (770) 973-6251 | Fax: (678) 401-3854
 Website: www.mgs4u.com | E-Mail: sales@mgs4u.com

TITLE: Large Fender Gasket for UHF female (SO-239) Connectors

DRAWING NO: 7518-L-GASKET

FILE NO :

| NO. DESCRIPTION | BODY | MATERIAL | FINISH | QTY | UNIT: mm | SILICONE | BLACK | SCALE: - | SCALE: - | DRAWN | CHECKED | APPROVED | PART NO | DATE | DATE | DATE |
|-----------------|------|----------|--------|-----|----------|----------|-------|----------|----------|-------|---------|----------|---------|------|------|------|
| | | | | 1 | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |

UNLESS OTHERWISE SPECIFIED TOLERANCES
 0.5-5 = ±0.2
 5-30 = ±0.4
 30-120 = ±0.6
 120-515 = ±1
 515-1000 = ±1.6
 1000-2000 = ±2.4