

150 Dodd Street SE Marietta, GA. 30060

 Phone: 770-973-6251
 Email: info@mgs4u.com

 Fax: 678-401-3854
 Website: www.mgs4u.com

BNC male to UHF female Adapter



Technical Data Sheet

This BNC male to UHF female adapter is one of several thousand RF products available from Max-Gain Systems, Inc. This adapter is a between series coaxial adapter.

This adapter is made from a Solid Brass body that is precision machined and plated with Nickel for superior performance and value. This BNC male to UHF female adapter has a Delrin dielectric and a gold plated brass center pin. The BNC male side accepts the BNC female tabs or "bayonets" for quick and reliable connections and disconnections. The UHF female side (also known as a SO-239 connection) is by far the most popular connection type used in Amateur Radio.

Material Specifications

BNC male to UHF female Adapter

Part Number 7060

Description	Material	Plating
Shell	Zinc Alloy	Silver
Washer	Steel	Silver
Spring	SK5	Silver
Gasket	Rubber	Red
Center Pin	Brass	Gold
Insulator	PTFE	White
Body	Brass	Nickel

Mechanical Specifications


Size	Dimension
Length	1.29 in (32.9 mm)
Width	0.61 in (15.5 mm)
Height	0.61 in (15.5 mm)
Weight	0.7 oz (20 g)

Environmental Specifications

Temperature	Spec
Operating Range	-65 to +165 deg C

Compliance Certifications (see product page for current documentation)

Availability Click the following link (or enter part number in the "SEARCH" bar at the top of any page of the website) to obtain additional part information including price, inventory and certifications: https://mgs4u.com/product/bnc-male-to-uhf-female-adapter-better-7060/

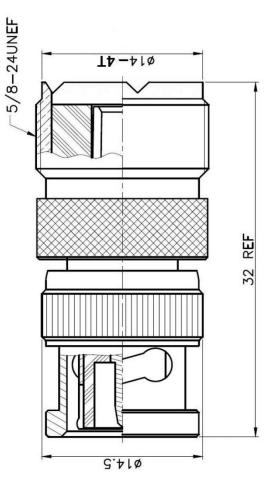

MAX-GAIN SYSTEMS, INC.

Max-Gain Systems, Inc. 150 Dodd Street SE, Marietta, GA. 30060 Phone: (770) 973-6251 Fax: (678) 401-3854 Website: www.mgs4u.com E-Mail: sales@mgs4u.com				TITLE: BNC male to UHF female Adapter				DEAMING NO. 7060	DAIE DRAWING NO. 7000	FILE NO : .		
DATE			2	DATE					DAIE			
APPROVED				CHECKED DRAWN			CKAWN					
UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5–5 = ±0.2 30–120 = ±0.6 120–315 = ±1 315–1000 = ±1.6 1000–2000 = ±2.4 UNIT: mrm												
	-	1	1	1		1	1		1	-	<u>C</u>	
	NICKEL	NICKEL	NICKEL	D E D	NED	COLD	WHITE		NICKEL		FINISH	
	ZINC ALLOY	SLEEL	SMS	RUBB E R		BRASS	NIG 13U	DELNIN	BRASS	2000	MATERIAL	
	SHELL	WASHER	SPRING	GASKET		PIN	INCLII ATOD	NO LA DOSNI	BODY		O. DESCRIPTION	