



150 Dodd Street SE
Marietta, GA. 30060

Phone: 770-973-6251
Fax: 678-401-3854

Email: info@mgs4u.com
Website: www.mgs4u.com

RP-TNC female to Type N male Adapter



Technical Data Sheet

This RP-TNC female to Type N male adapter is one of several thousand RF products available from Max-Gain Systems, Inc. This adapter is a between series coaxial adapter.

This adapter is made from a Solid Brass body that is precision machined and plated with Nickel for superior performance and value. This RP-TNC female to Type N male adapter has a Delrin dielectric and a gold plated brass center pin. The RP-TNC female side provides the pins that are normally found in TNC male connections, RP-TNC connections are popular in wireless and Wi-Fi applications. The Type N male side contains a gasket, for shock- / vibration- resistant and waterproof connections.

Material Specifications

RP-TNC female to Type N male Adapter

Part Number 7345

Description	Material	Plating
Insulator	Delrin	White
Pin	Brass	Gold
Body	Brass	Nickel

Mechanical Specifications


Size	Dimension
Length	1.27 in (32.2 mm)
Width	0.78 in (20 mm)
Height	0.78 in (20 mm)
Weight	1.2 oz (34 g)

Environmental Specifications

Temperature	Spec
Operating Range	-65 to +165 deg C

Compliance Certifications (see product page for current documentation)

Availability Click the following link (or enter part number in the “SEARCH” bar at the top of any page of the website) to obtain additional part information including price, inventory and certifications: <https://mgs4u.com/product/rp-tnc-female-to-type-n-male-adapter-7345/>

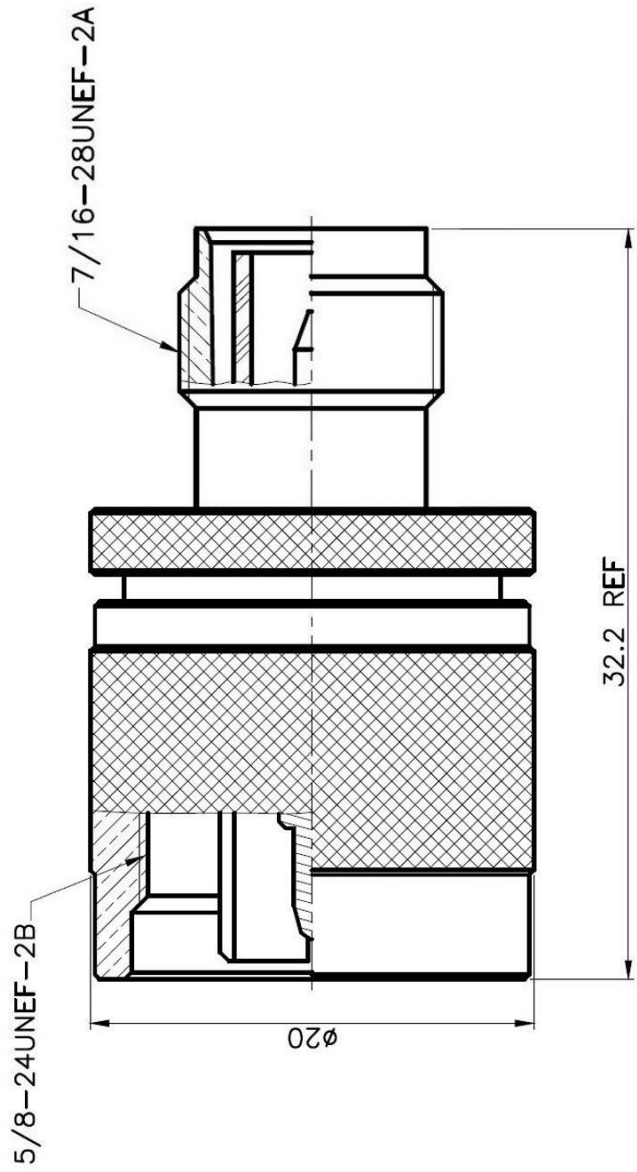

Max-Gain Systems, Inc.
 150 Dodd Street SE, Marietta, GA. 30060
 Phone: (770) 973-6251 | Fax: (678) 401-3854
 Website: www.mgs4u.com | E-Mail: sales@mgs4u.com

TITLE: RP-TNC female to Type N male Adapter

DRAWING NO: 7345
 FILE NO :

NO.	DESCRIPTION	MATERIAL	QTY	FINISH	UNLESS OTHERWISE SPECIFIED TOLERANCES		UNIT: mm	SCALE: -	PART NO		DATE	
					0.5-5	±0.2						
					5-30	±0.4						
					30-120	±0.6						
	SHELL	BRASS	1	NICKEL	120-315	±1			APPROVED		DATE	
	C RING	BRASS	1	NONE	315-1000	±1.6			CHECKED		DATE	
	GASKET	RUBBER	1	RED	1000-2000	±2.4			DRAWN		DATE	
	PIN	BRASS	1	GOLD								
	INSULATOR	DELTRIN	1	WHITE								
	BODY	BRASS	1	NICKEL								
	DESCRIPTION	MATERIAL		FINISH								