



150 Dodd Street SE
Marietta, GA. 30060

Phone: 770-973-6251
Fax: 678-401-3854

Email: info@mgs4u.com
Website: www.mgs4u.com

UHF female to BNC male Right Angle Adapter

Technical Data Sheet

This UHF female to BNC male Right Angle adapter is one of several thousand RF products available from Max-Gain Systems, Inc. This adapter is a between series coaxial adapter.

This adapter is made from a Solid Brass body that is precision machined and plated with Silver for superior performance and value. This UHF female to BNC male adapter has a Delrin dielectric and a gold plated brass center pin. The UHF female side (also known as a SO-239 connection) is by far the most popular connection type used in Amateur Radio. The BNC male side accepts the BNC female tabs or "bayonets" for quick and reliable connections and disconnections.

Material Specifications

UHF female to BNC male Right Angle Adapter

Part Number 7060-RA

Description	Material	Plating
Shell	Zinc Alloy	Nickel
Washer	Steel	Nickel
Spring	SK5	Nickel
Gasket	Rubber	Red
Center Pin	Brass	Gold
Insulator	Delrin	White
Body	Brass	Nickel

Mechanical Specifications


Size	Dimension
Length	1.29 in (32.9 mm)
Width	1.15 in (29.3 mm)
Height	0.61 in (15.5 mm)
Weight	1.2 oz (34 g)

Environmental Specifications

Temperature	Spec
Operating Range	-65 to +165 deg C

Compliance Certifications (see product page for current documentation)

Availability Click the following link (or enter part number in the “SEARCH” bar at the top of any page of the website) to obtain additional part information including price, inventory and certifications: <https://mgs4u.com/product/uhf-female-to-bnc-male-right-angle-adapter-7060-ra/>

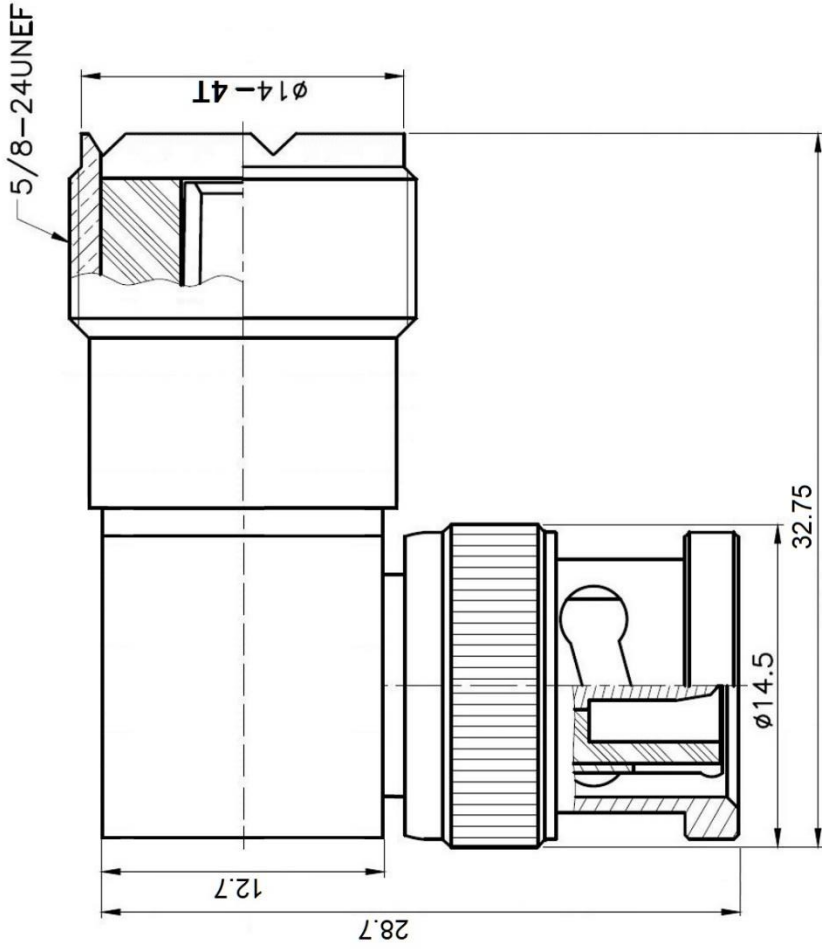

MGS MAX-GAIN SYSTEMS, INC.

Max-Gain Systems, Inc.
 150 Dodd Street SE, Marietta, GA, 30060
 Phone: (770) 973-6251 | Fax: (678) 401-3854
 Website: www.mgs4u.com | E-Mail: sales@mgs4u.com

TITLE: UHF female to BNC male Adapter,
 Right Angle

DRAWING NO: 7060-RA
 FILE NO: .

NO.	DESCRIPTION	MATERIAL	FINISH	QTY	SCALE: .	UNIT: mm	UNLESS OTHERWISE SPECIFIED TOLERANCES			PART NO	DATE
							0.5-5	5-30	30-120		
1	SHELL	ZINC ALLOY	NICKEL	1			±0.2	±0.4	±0.6		
1	WASHER	STEEL	NICKEL	1			±1.6	±2.4		APPROVED	DATE
1	SPRING	SK5	NICKEL	1						CHECKED	DATE
1	GASKET	RUBBER	RED	1						DRAWN	DATE
1	PIN	BRASS	GOLD	1							
1	INSULATOR BODY	DELTRIN BRASS	WHITE SILVER	1							