

150 Dodd Street SE Marietta, GA. 30060

Phone: 770-973-6251 **Fax:** 678-401-3854

Email: info@mgs4u.com
Website: www.mgs4u.com

Part Number 7517-16V-TGS

UHF female to UHF female Adapter

Technical Data Sheet

This UHF female to UHF female adapter is one of several thousand RF products available from Max-Gain Systems, Inc. This adapter is an in-series coaxial adapter.

This adapter is made from a Solid Brass body that is machined and plated with Silver for superior performance and value. This UHF female to UHF female adapter has a Teflon dielectric and a gold plated brass center pin. Both sides provide a UHF female side (also known as a SO-239 connection) is by far the most popular connection type used in Amateur Radio.

Material Specifications

UHF female to **UHF** female Adapter

Description	Material	Plating
Center Pin	Brass	Gold
Body	Brass	Silver
Insulator	PTFE	White

Mechanical Specifications


Size	Dimension
Length	1.1 in (28 mm)
Width	0.61 in (15.5 mm)
Height	0.61 in (15.5 mm)
Weight	0.7 oz (20 g)

Environmental Specifications

Temperature	Spec
Operating Range	-65 to +165 deg C

Compliance Certifications (see product page for current documentation)

Availability Click the following link (or enter part number in the "SEARCH" bar at the top of any page of the website) to obtain additional part information including price, inventory and certifications: https://mgs4u.com/product/uhf-female-to-uhf-female-barrel-adapter-best-7517-16v-tgs/

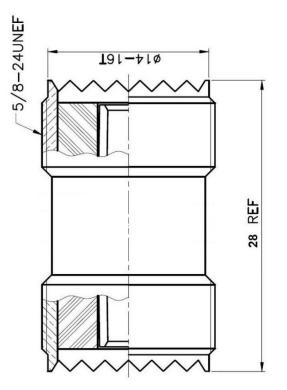

MAX-GAIN SYSTEMS, INC.

Max-Gain Systems, Inc. 150 Dodd Street SE, Marietta, GA. 30060 Phone: (770) 973-6251 Fax: (678) 401-3854 Website: www.mgs4u.com E-Mail: sales@mgs4u.com					TITLE: UHF female to UHF female Adapter			DATE DRAWING NO: 7517-16V-1GS	FILE NO : .
DATE		DATE	7		DATE	1 1 2		DATE	
PART NO		APPROVED		CHECKED				DRAWN	
	SPECIFIED TO FRANCES	120-315 = +1	120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4			1 UNIT: mm			
-		1	1	1	-	1	1	-	OΤ
						COLD	WHITE	SILVER	FINISH
						BRASS	TEFLON	BRASS	MATERIAL
						PIN	INSULATOR	BODY	O. DESCRIPTION