


Working Voltage	1,000
Frequency Range	DC to 10 GHz
Impedance	50 Ohms

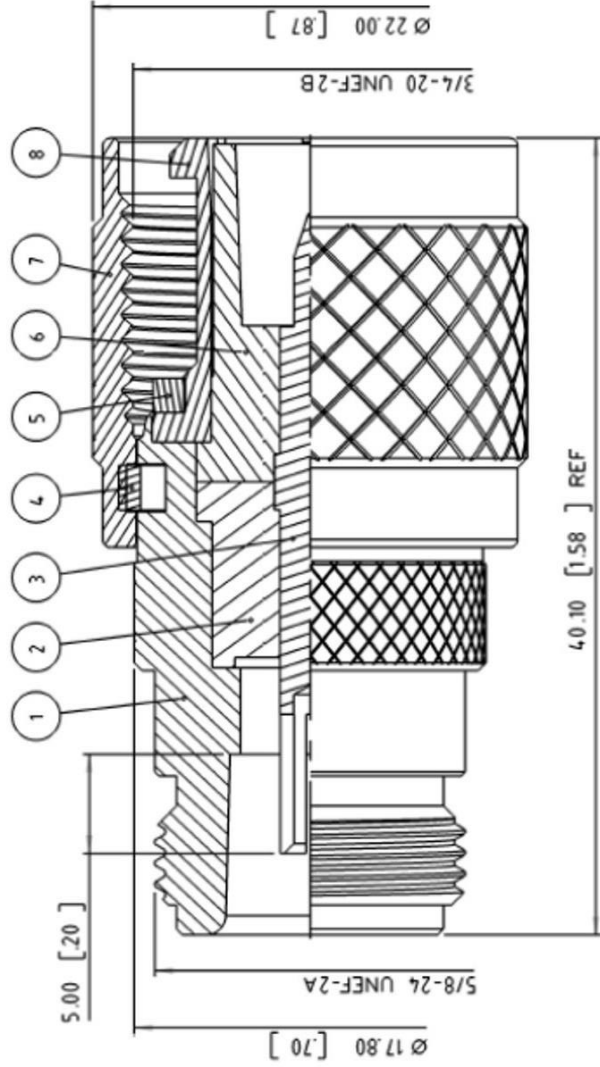

MGS MAX-GAIN SYSTEMS, INC.

Max-Gain Systems, Inc.
 150 Dodd Street SE, Marietta, GA. 30060
 Phone: (770) 973-6251 | Fax: (678) 401-3854
 Website: www.mgs4u.com | E-Mail: sales@mgs4u.com

TITLE: Type N female to HN male Adapter

DRAWING NO: 8321

CAGE CODE: 7JZZ8

NO.	DESCRIPTION	MATERIAL	QTY	UNIT: mm	SCALE: .	PART NO	DATE
8	INNER CONTACT	BRASS	1				
7	SHELL	BRASS	1				
6	INSULATOR	TEFLON	1				
5	GASKET	SILICONE	1				
4	HOLDING RING	PHOSPHOR BRONZE	1				
3	PIN	PHOSPHOR BRONZE	1				
2	INSULATOR	TEFLON	1				
1	BODY	BRASS	1				
				UNLESS OTHERWISE SPECIFIED TOLERANCES			
				0.5-5 = ±0.2			
				5-30 = ±0.4			
				30-120 = ±0.6			
				120-315 = ±1.0			
				315-1000 = ±1.6			
				1000-2000 = ±2.4			
				APPROVED	DATE		
				CHECKED	DATE		
				DRAWN	DATE		