


VF61-26S

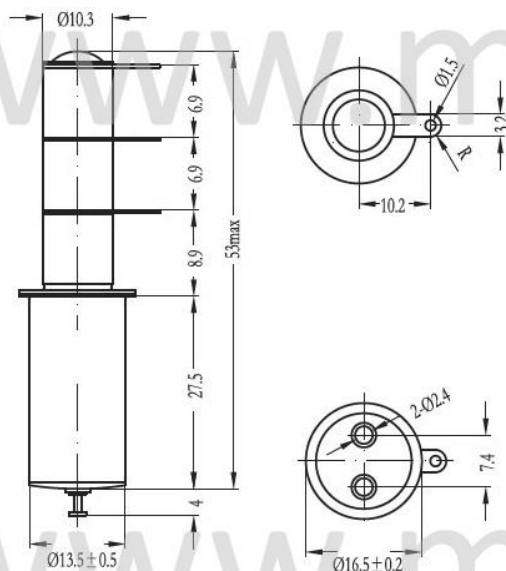

PRODUCT SPECIFICATIONS

Item		VF61-26S
Contact Form		C
Contact Arrangement		SPDT
Contact Material (moveable/stationary)		molybdenum/tungsten
Maximum Peak Test Voltage, Contacts and to Base (15μA Leak Current Max.) dc or 60Hz (kV)		4
Maximum Peak Operating Voltage, Contacts and to Base (15μA Leak Current Max.) (kV)	dc or 60Hz	3.6
	2.5MHz	3.6
	16MHz	3.2
	32MHz	2.5
Current, Load Switching		Contact factory
Current, Continuous Carry Max (A)	dc or 60Hz	10
	2.5MHz	8
	13.56MHz	7
	32MHz	5
Coil Hi-Pot (V RMS, 60 Hz)		500
Capacitance Max (pF)	Across Open Contacts	1.6
	Contacts to Ground	2
Operate Time Max (ms)		10
Release Time Max (ms)		10
Resistance, Contact Max @ 1A, 28 Vdc (Ω)		0.02
Operating Temperature Ambient (°C)		-55 ~ +125
Vibration, Operating, Sine (10-2000 Hz Peak) (G's)		10
Shock, Operating, 1/2 Sine 11ms (Peak) (G's)		50
Life, Mechanical (Cycles)		0.5 million
Weight, Nominal g(oz)		28(1)

COIL RATINGS

Nominal, Volts dc	26.5
Pull-in, Volts dc, Max.	16
Drop-out, Volts dc	1~10
Coil Resistance (Ω ±10%)	290
☆Ratings Listed are for 25°C, Sea Level Conditions	

Ordering
Information:

MGS

MAX-GAIN SYSTEMS, INC.

150 Dodd Street SE, Marietta, GA. 30060 | **Cage:** 7JZZ8
Phone: (770) 973-6251 | **Fax:** (678) 401-3854 | **EIN:** 58-1857241
Website: www.mgs4u.com | **E-Mail:** sales@mgs4u.com | **UEI:** NSM7F25322F1