


Impedance	50 Ohms
Frequency Range	DC to 10 GHz
VSWR	1.3:1
Working Voltage	1,000

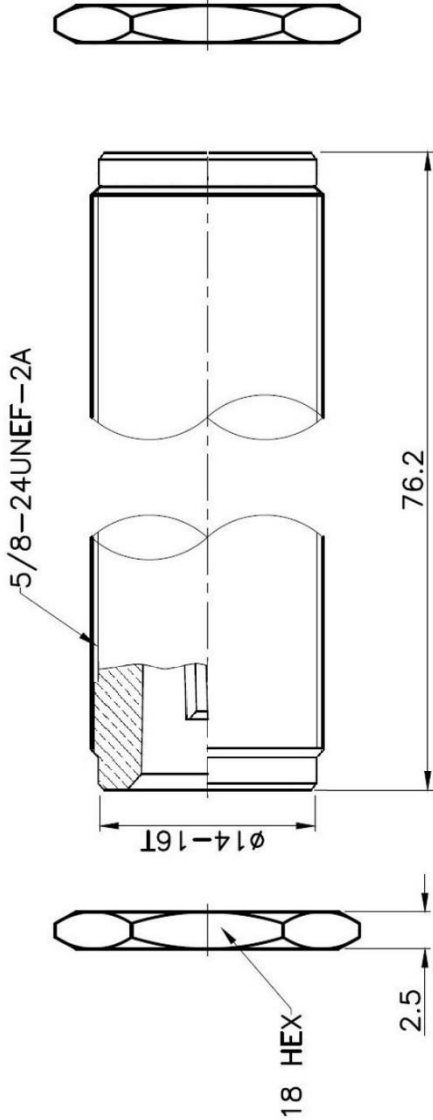

Max-Gain Systems, Inc.
 150 Dodd Street SE, Marietta, GA 30060
 Phone: (770) 973-6251 | Fax: (678) 401-3854
 Website: www.mgs4u.com | E-Mail: sales@mgs4u.com

Type N female to Type N female 3 Inch Bulkhead Mount Adapter
DRAWING NO: 7318-N-BC-3
FILE NO : .

NO. DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED TOLERANCES		PART NO	DATE
			0.5-5	±0.2		
			5-30	±0.4		
			30-120	±0.6		
NUT	BRASS	NICKEL	120-315	±1	APPROVED	DATE
PIN	BRASS	GOLD	315-1000	±1.6	CHECKED	DATE
INSULATOR	DELTRIN	WHITE	1000-2000	±2.4	DRAWN	DATE
BODY	BRASS	NICKEL	UNIT: mm			
NO. DESCRIPTION		MATERIAL	SCALE: .			