


**CVDP 1500, 2300 SPECIFICATIONS**

Model Number	Capacity Range (pF)	Voltage (kV)		Current Amps (RMS) Max.	Type	Nominal Dimensions		Torque (in lbs.) Max.	Direct Pull (lbs.) Max.	Weight (nominal)
		Test	Working			Length (in/mm)	Diam. (in/mm)			
CVDP-1500-7.5S	35-1500	7.5	4.5	150	Ceramic	9.80 / 248.92	5.56 / 142.75	8.0	84	9 lb. 14 oz.
CVDP-1500-10S	35-1500	10	6.0	155	Ceramic	9.80 / 248.92	5.56 / 142.75	8.0	84	9 lb. 14 oz.
CVDP-1500-15S	35-1500	15	9.0	160	Ceramic	9.80 / 248.92	5.56 / 142.75	8.0	84	9 lb. 14 oz.
CVDP-2300-7.5S	50-2300	7.5	4.5	160	Ceramic	9.80 / 248.92	5.60 / 142.80	8.0	84	9 lb. 14 oz.
CVDP-2300-10S	50-2300	10	6.0	180	Ceramic	9.80 / 248.92	5.60 / 142.80	8.0	84	9 lb. 14 oz.
CVDP-2300-15S	50-2300	15	9.0	200	Ceramic	9.80 / 248.92	5.60 / 142.80	8.0	84	9 lb. 14 oz.

NOTES:

Mounting: Both ends have tapped holes.

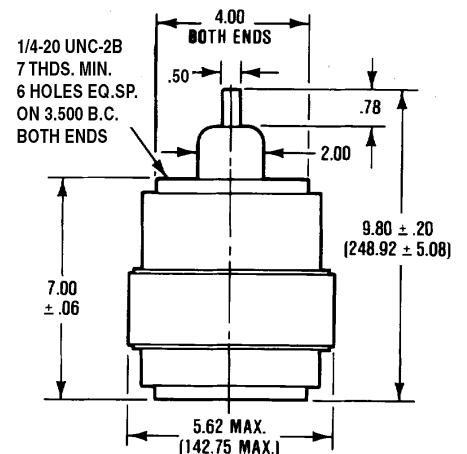



CAPACITANCE VS TURNS
CVDP-1500

