


VF62-26S

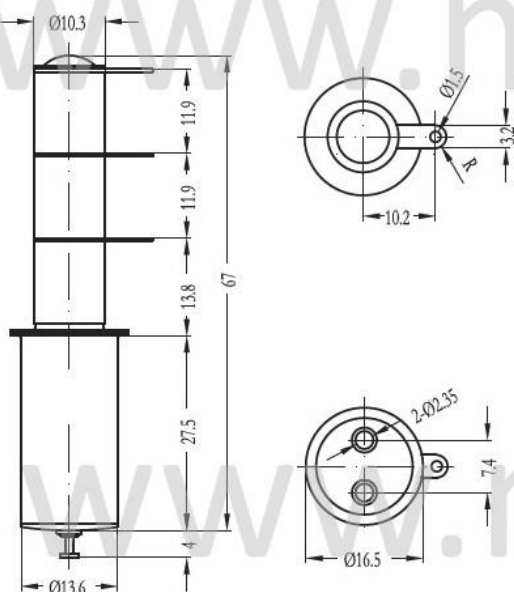

PRODUCT SPECIFICATIONS

Item		VF62-26S
Contact Form		C
Contact Arrangement		SPDT
Maximum Peak Test Voltage, Contacts and to Base (15µA Leak Current Max.) dc or 60Hz (kV)		9
Contact Material (moveable/stationary)		
Maximum Peak Operating Voltage, Contacts and to Base (kV) (15µA Leak Current Max.)	dc or 60Hz	7
	2.5MHz	7
	16MHz	6
	32MHz	4
Current, Continuous Carry Max (A)	dc or 60Hz	10
	2.5MHz	10
	13.56MHz	6
	32MHz	5
Coil Hi-Pot (V RMS, 60 Hz)		500
Capacitance Max (pF)	Across Open Contacts	1.6
	Contacts to Ground	1.1
Operate Time Max (ms)		10
Release Time Max (ms)		10
Resistance, Contact Max @ 1A, 28 Vdc (Ω)		0.02
Operating Temperature Ambient (°C)		-55 ~ +125
Shock, Operating, 1/2 Sine 11ms (Peak) (G's)		50
Vibration, Operating, Sine (10-2000 Hz Peak) (G's)		10
Life, Mechanical (Cycles)		0.5 million
Weight, Nominal g(oz)		28(1)

COIL RATINGS

Nominal, Volts dc	26.5
Pull-in, Volts dc, Max.	16
Drop-out, Volts dc	1~10
Coil Resistance (Ω ±10%)	290

☆Ratings Listed are for 25°C, Sea Level Conditions

Ordering
Information:

MGS

MAX-GAIN SYSTEMS, INC.

150 Dodd Street SE, Marietta, GA. 30060 | **Cage:** 7JZZ8
Phone: (770) 973-6251 | **Fax:** (678) 401-3854 | **EIN:** 58-1857241
Website: www.mgs4u.com | **E-Mail:** sales@mgs4u.com | **UEI:** NSM7F253Z2F1