


Impedance (Nominal)	50 Ohms
Frequency Range	DC to 400 Mhz
VSWR	1.3:1
Working Voltage	1,000

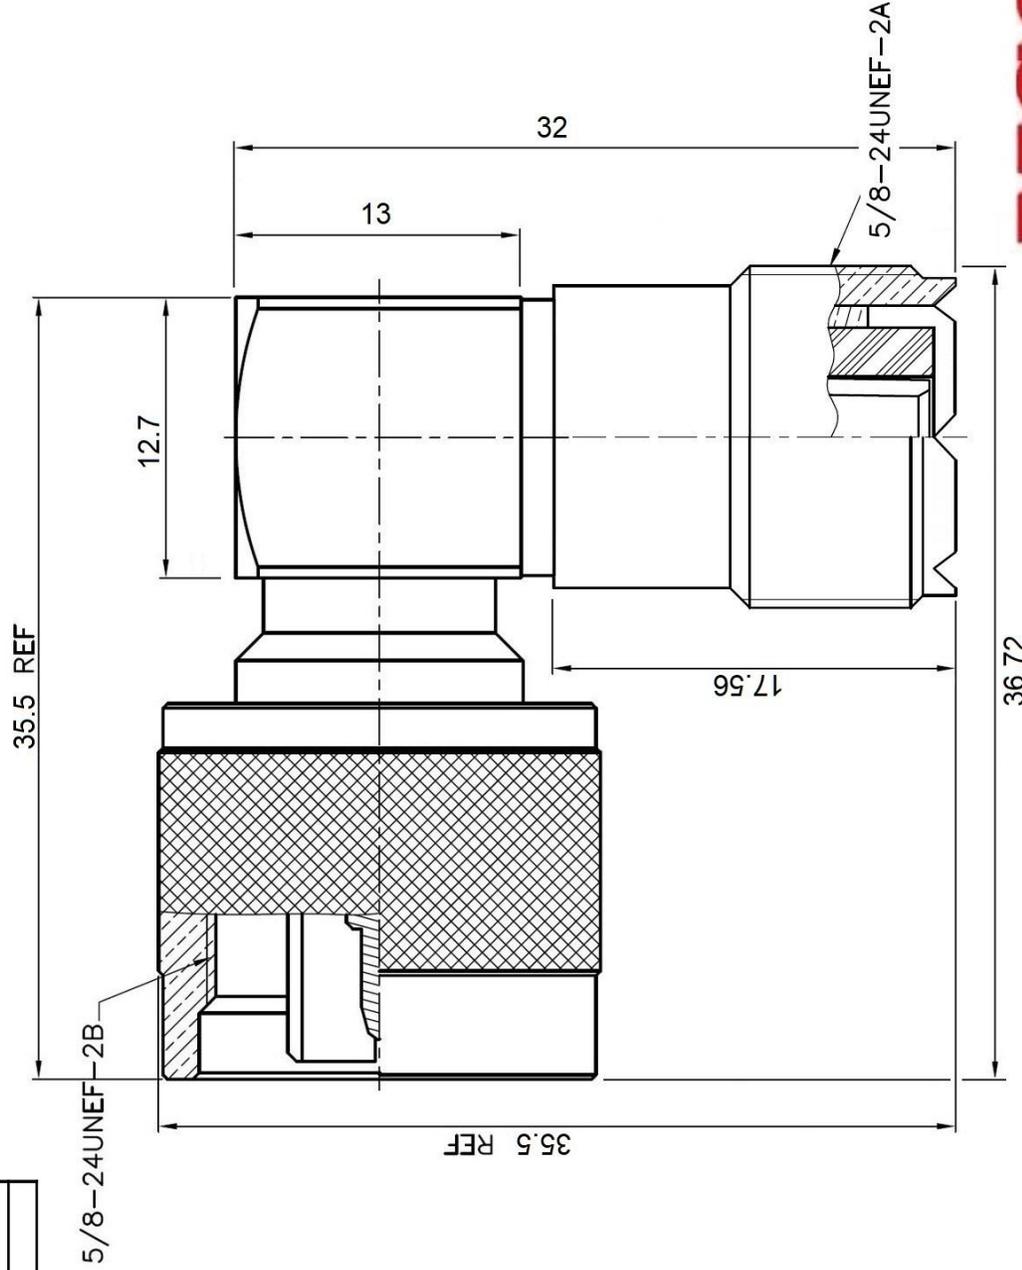

**MGS** MAX-GAIN SYSTEMS, INC.

Max-Gain Systems, Inc.  
 150 Dodd Street SE, Marietta, GA, 30060  
 Phone: (770) 973-6251 | Fax: (678) 401-3854  
 Website: www.mgs4u.com | E-Mail: sales@mgs4u.com

TITLE: Type N male to UHF female male  
 Right Angle Adapter

DRAWING NO: 7330-RA

CAGE CODE: 7JZZ8

		PART NO	DATE
		APPROVED	DATE
		CHECKED	DATE
		DRAWN	DATE
		UNLESS OTHERWISE SPECIFIED TOLERANCES	
		0.5-5 = ±0.2	
		5-30 = ±0.4	
		30-120 = ±0.6	
		120-315 = ±1	
		315-1000 = ±1.6	
		1000-2000 = ±2.4	
		UNIT: mm	
		SCALE: .	
SHELL	BRASS	NICKEL	
C RING	BRASS	NONE	
GASKET	SILICONE	ORANGE	
PIN	BRASS	GOLD	
INSULATOR	DELRIN	WHITE	
BODY	BRASS	NICKEL	
NO. DESCRIPTION	MATERIAL	FINISH	