



Working Voltage	500
Dielectric Withstanding Voltage	1,500
Frequency Range	DC to 4 GHz
Max VSWR	1.5:1
Impedence	50 Ohms

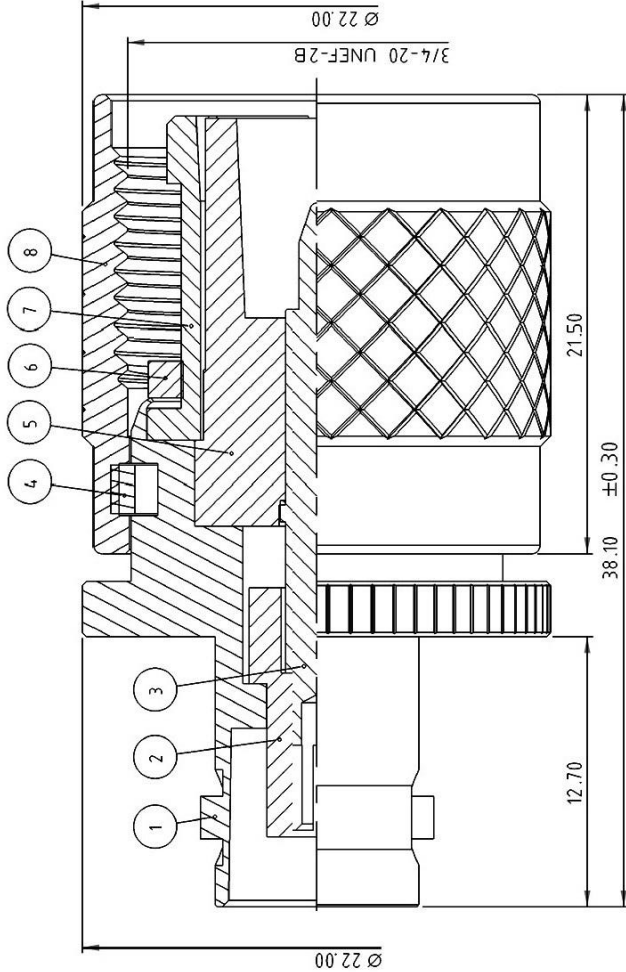

MGS MAX-GAIN SYSTEMS, INC.

Max-Gain Systems, Inc.
150 Dodd Street SE, Marietta, GA. 30060
Phone: (770) 973-6251 | Fax: (678) 401-3854
Website: www.mgs4u.com | E-Mail: sales@mgs4u.com

TITLE: HN male to BNC female Adapter

DRAWING NO: 8319

CAGE CODE: 7JZZ8

NO.	DESCRIPTION	MATERIAL	FINISH	QTY	UNLESS OTHERWISE SPECIFIED TOLERANCES		UNIT: mm	SCALE: -	PART NO		DATE	
					NICKEL (30u-in min)	NICKEL (30u-in min)			APPROVED		DATE	
									1	1	CHECKED	DATE
8	SHELL	BRASS		1								
7	INNER CONTACT	BRASS		1								
6	GASKET	SILICONE	RED	1								
5	INSULATOR	TEFLON	WHITE	1								
4	HOLDING RING	PHOSPHOR BRONZE		1								
3	PIN	PHOSPHOR BRONZE	GOLD (30u-in min)	1								
2	INSULATOR	TEFLON	WHITE	1								
1	BODY	BRASS	NICKEL (30u-in min)	1								

UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5-5 = ±0.2
5-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4