
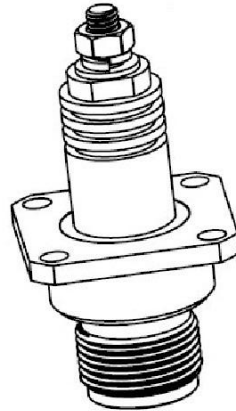
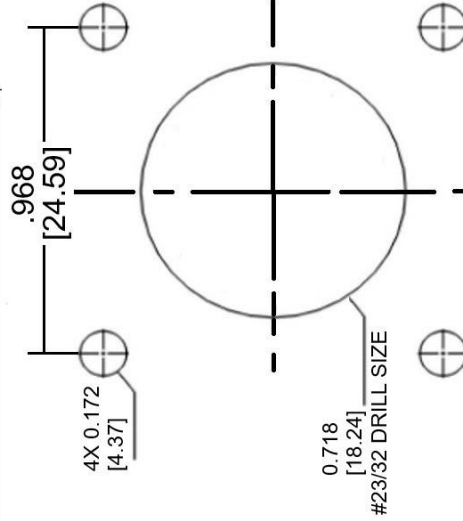
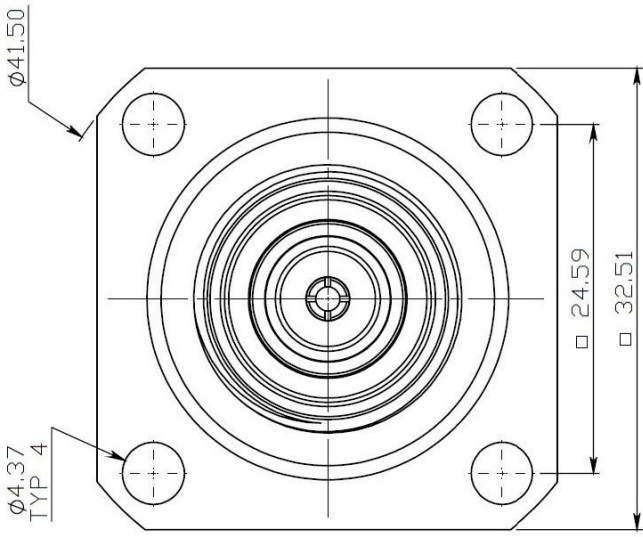


Working Voltage	6,000
Frequency Range	DC to 4 GHz
Impedence	50 Ohms

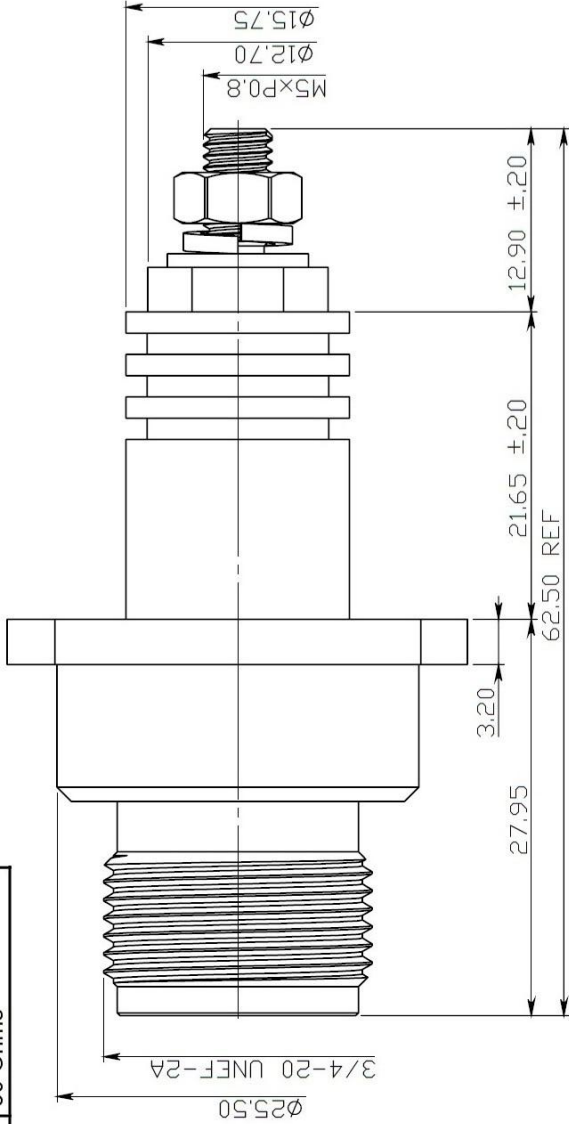

RECOMMENDED MOUNTING

NO.	DESCRIPTION	MATERIAL	FINISH	QTY
9	NUT	BRASS		
8	WASHER	BRASS		
7	WASHER	BRASS		
6	INSULATOR	TEFLON	WHITE	
5	PIN	BRASS	SILVER	1
4	INSULATOR	TEFLON	WHITE	1
3	PIN	BERYLLIUM COPPER	SILVER	1
2	WASHER	PHOSPHOR BRONZE	NICKEL	1
1	BODY	BRASS	TRI-METAL, CuSnZn	1

UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5-5 = ±0.2
5-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

PART NO	DATE
APPROVED	DATE
CHECKED	DATE
DRAWN	DATE

UNIT: mm
SCALE: -

MGS MAX-GAIN SYSTEMS, INC.

Max-Gain Systems, Inc.
150 Dodd Street SE, Marietta, GA. 30060
Phone: (770) 973-8251 | Fax: (678) 401-3854
Website: www.mgs4u.com | E-Mail: sales@mgs4u.com

TITLE: HN female 4 Hole Panel Mount
High Voltage Threaded Terminal

DRAWING NO: 8313-HN
FILE NO :