


Impedance (Nominal)	50 Ohms
Frequency Range	DC to 4Ghz
VSWR	1.4:1
Working Voltage	1,500

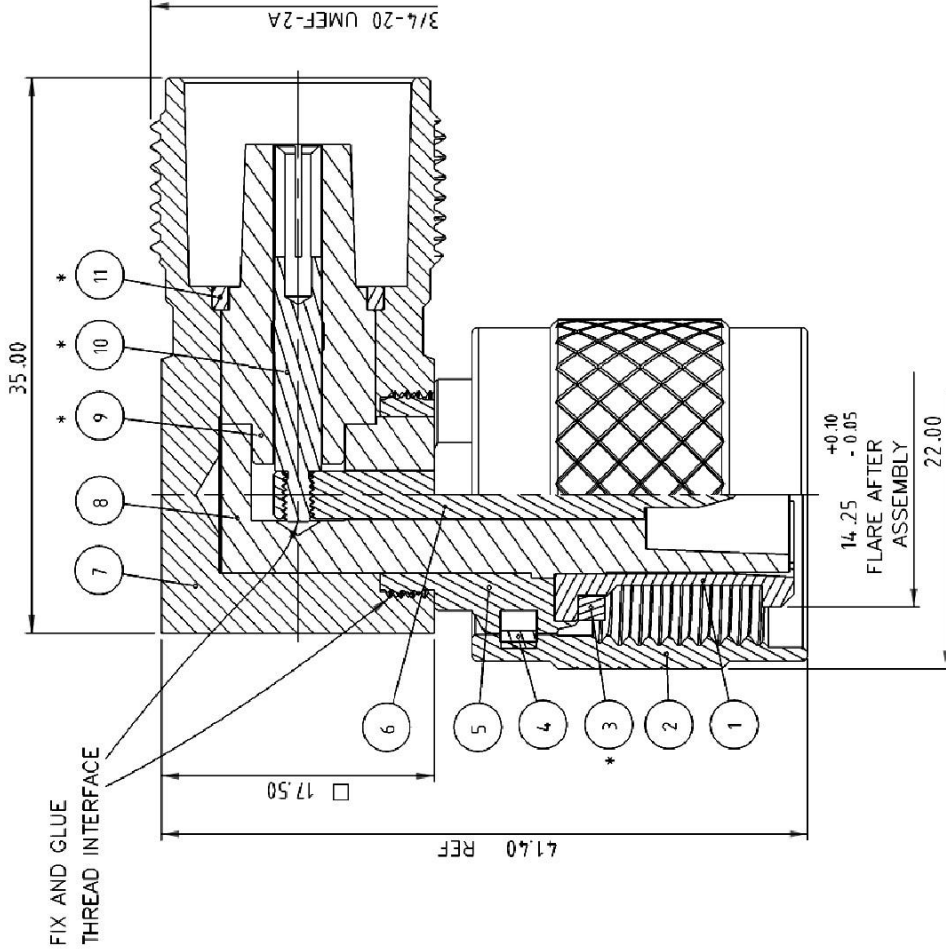

MGS MAX-GAIN SYSTEMS, INC.

Max-Gain Systems, Inc.
150 Dodd Street SE, Marietta, GA. 30060
Phone: (770) 973-6251 | Fax: (678) 401-3854
Website: www.mgs4u.com | E-Mail: sales@mgs4u.com

11 10 9 8 7 6 5 4 3 2 1 NO.	WASHER CENTER PIN INSULATOR INSULATOR BODY CENTER PIN BODY HOLDING RING GASKET SHELL INNER CONTACT DESCRIPTION	BRASS PHOSPHOR BRONZE PTFE PTFE BRASS BRASS BRASS PHOSPHOR BRONZE SILICONE BRASS BRASS MATERIAL	NICKEL GOLD(3u") WHITE WHITE NICKEL GOLD(3u") NICKEL RED NICKEL NICKEL FINISH	UNLESS OTHERWISE SPECIFIED TOLERANCES		PART NO		DATE	
				0.5-5 = ±0.2 5-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4		APPROVED		DATE	
				UNIT: mm		CHECKED		DATE	
				SCALE: .		DRAWN		DATE	

TITLE: HN female to HN male
Right Angle Adapter
DRAWING NO: 8337-RA
CAGE CODE: 7JZZ8