

Impedance (Nominal)	50 Ohms
Frequency Range	DC to 4Ghz
VSWR	1.4:1
Working Voltage	1,500

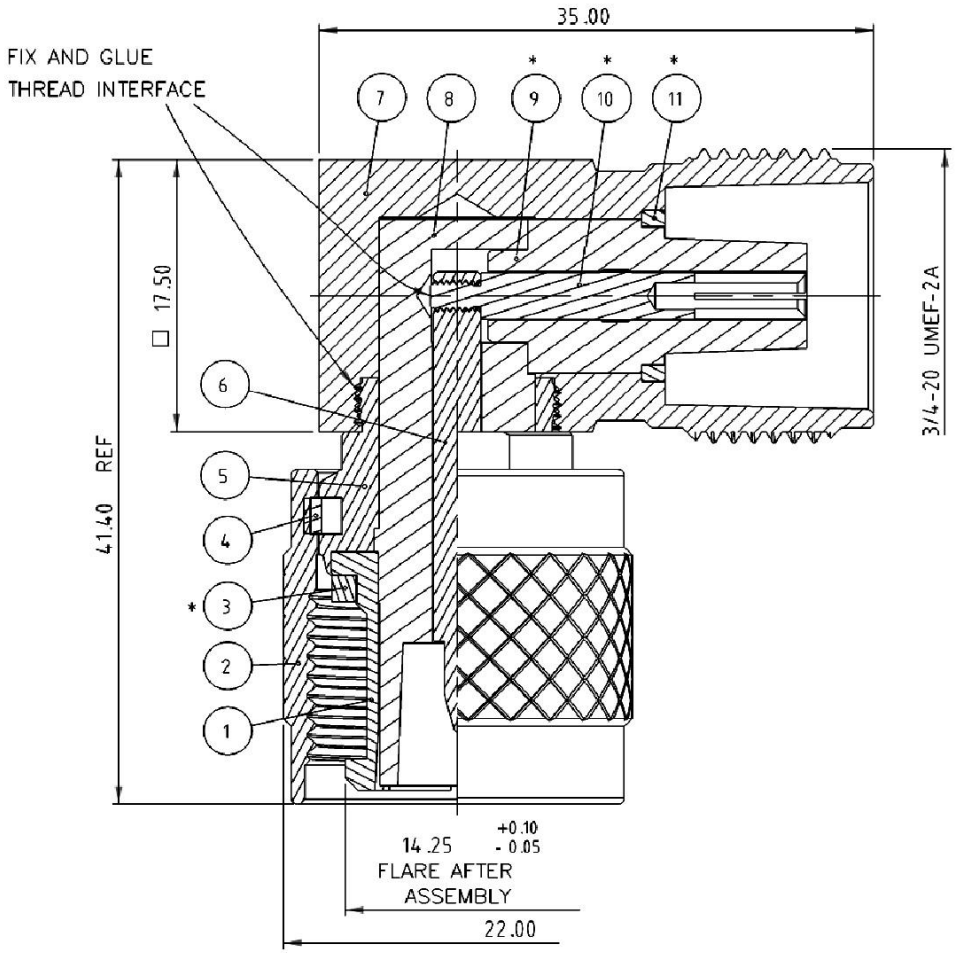



NO.	DESCRIPTION	MATERIAL	FINISH	
11	WASHER	BRASS	NICKEL	
10	CENTER PIN	PHOSPHOR BRONZE	GOLD(3u")	
9	INSULATOR	PTFE	WHITE	
8	INSULATOR	PTFE	WHITE	
7	BODY	BRASS	NICKEL	
6	CENTER PIN	BRASS	GOLD(3u")	
5	BODY	BRASS	NICKEL	
4	HOLDING RING	PHOSPHOR BRONZE		
3	GASKET	SILICONE	RED	
2	SHELL	BRASS	NICKEL	
1	INNER CONTACT	BRASS	NICKEL	

UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5–5 = ±0.2
5–30 = ±0.4
30–120 = ±0.6
120–315 = ±1
315–1000 = ±1.6
1000–2000 = ±2.4

UNIT: mm

SCALE: .

PART NO	DATE
APPROVED	DATE
CHECKED	DATE
DRAWN	DATE

MGS MAX-GAIN SYSTEMS, INC.

Max-Gain Systems, Inc.
150 Dodd Street SE, Marietta, GA. 30060
Phone: (770) 973-6251 | **Fax:** (678) 401-3854
Website: www.mgs4u.com | **E-Mail:** sales@mgs4u.com

TITLE: HN male to HN female
Right Angle Adapter

DRAWING NO: 8337-RA

CAGE CODE: 7JZZ8