
Impedence	50 Ohms
Frequency Range	DC to 400 MHz
VSWR	1.3:1
Working Voltage	1,000

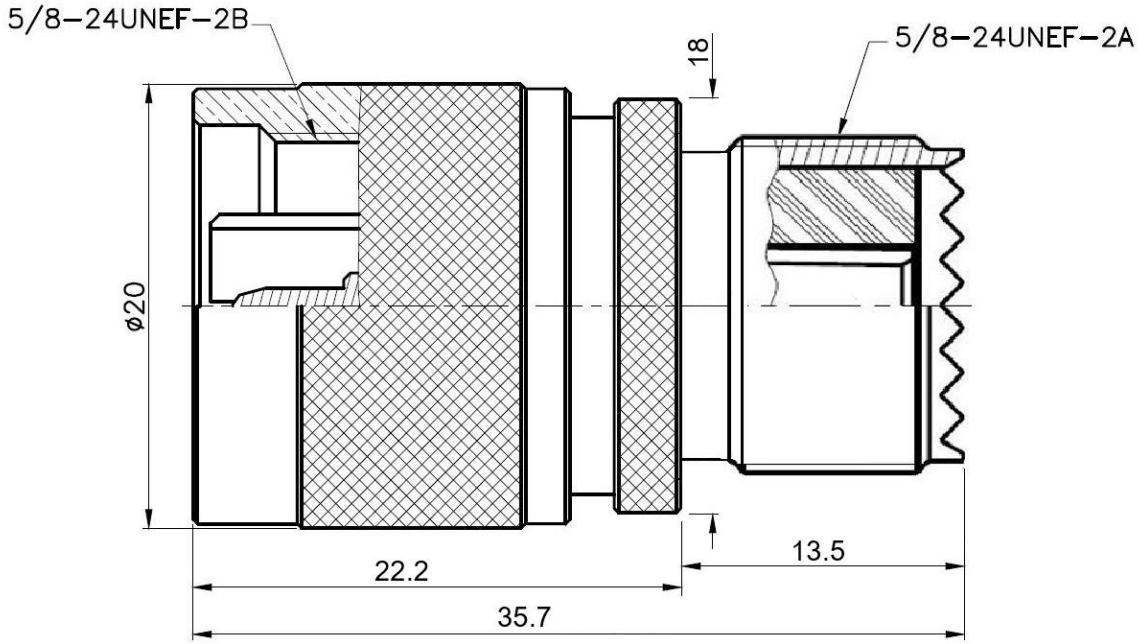

NO.	DESCRIPTION	MATERIAL	FINISH
	PIN	BRASS	GOLD
	GASKET	SILICONE	RED
	INSULATOR	TEFLON	WHITE
	BODY	BRASS	SILVER

UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5–5 = ±0.2
5–30 = ±0.4
30–120 = ±0.6
120–315 = ±1
315–1000 = ±1.6
1000–2000 = ±2.4

UNIT: mm

SCALE: .

PART NO	DATE
APPROVED	DATE
CHECKED	DATE
DRAWN	DATE

MGS MAX-GAIN SYSTEMS, INC.

Max-Gain Systems, Inc.
150 Dodd Street SE, Marietta, GA. 30060
Phone: (770) 973-6251 | **Fax:** (678) 401-3854
Website: www.mgs4u.com | **E-Mail:** sales@mgs4u.com

TITLE: Type N male to UHF female Adapter

DRAWING NO: 7330-TGS

CAGE CODE: 7JZZ8