



150 Dodd Street SE
Marietta, GA. 30060

Phone: 770-973-6251
Fax: 678-401-3854

Email: info@mgs4u.com
Website: www.mgs4u.com

Type N male to BNC female Right Angle Adapter



Technical Data Sheet

This Type N male to BNC female right angle adapter is one of several thousand RF products available from Max-Gain Systems, Inc. This adapter is a between series coaxial adapter.

This adapter is made from a Solid Brass body that is precision machined and plated with Nickel for superior performance and value. This Type N male to BNC female adapter has a delrin dielectric and a gold plated brass center pin. The Type N male side contains a gasket, for shock / vibration resistant and waterproof connections. The BNC female provides tabs or "bayonets" for quick and reliable connections and disconnections.

Material Specifications

Type N male to BNC female Right Angle Adapter

Part Number 7324-RA

Description	Material	Plating
Shell	Brass	Nickel
C Ring	Brass	None
Gasket	Silicone	Orange
Pin	Brass	Gold
Insulator	Delrin	White
Body	Brass	Nickel

Mechanical Specifications

Size	Dimension
Length	1.39 in (35.4 mm)
Width	0.78 in (20 mm)
Height	1.24 in (31.46 mm)
Weight	1.5 oz (42 g)

Environmental Specifications

Temperature	Spec
Operating Range	-65 to +165 deg C

Compliance Certifications (see product page for current documentation)


Availability Click the following link (or enter part number in the “SEARCH” bar at the top of any page of the website) to obtain additional part information including price, inventory and certifications: <https://mgs4u.com/product/type-n-male-to-bnc-female-right-angle-adapter/>

MGS

MAX-GAIN
SYSTEMS, INC.

Max-Gain Systems, Inc.
150 Dodd Street SE, Marietta, GA. 30060
Phone: (770) 973-6251 Fax: (678) 401-3854
Website: www.mgs4u.com | E-Mail: sales@mgs4u.com

TITLE: Type N male to BNC female Right Angle
Adapter
DRAWING NO: 7324-RA
CAGE CODE: 7JZZ8

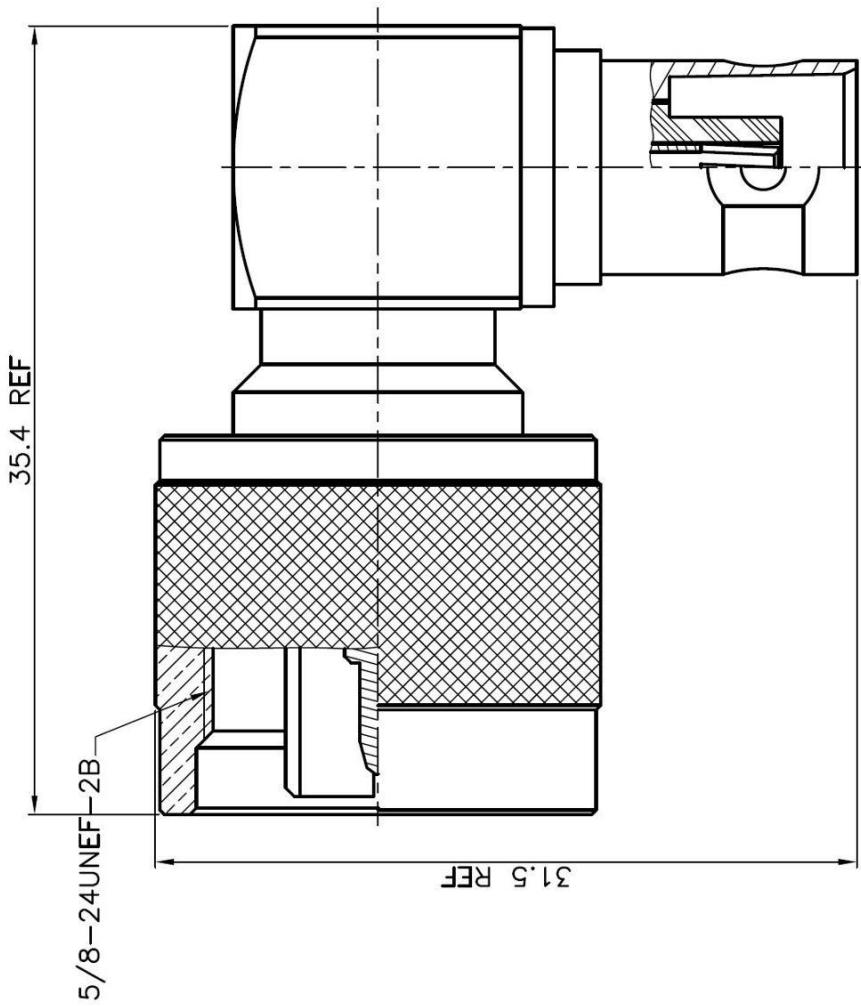

NO. DESCRIPTION	MATERIAL	SCALE: -	DRAWN	DATE	DRAWING NO: 7324-RA
SHELL	BRASS	WHITE	NICKEL	UNLESS OTHERWISE SPECIFIED	PART NO
C RING	BRASS		NICKEL	0.5-5 - ± 0.2	DATE
GASKET	SILICONE		ORANGE	5-30 - ± 0.4	APPROVED
PIN	BRASS		GOLD	30-120 - ± 0.6	DATE
INSULATOR	DELRIN			120-315 - ± 1	CHECKED
BODY	BRASS			315-1000 - ± 1.6	DATE
	MATERIAL			1000-2000 - ± 2.4	
			UNIT: mm		
			SCALE: -		