
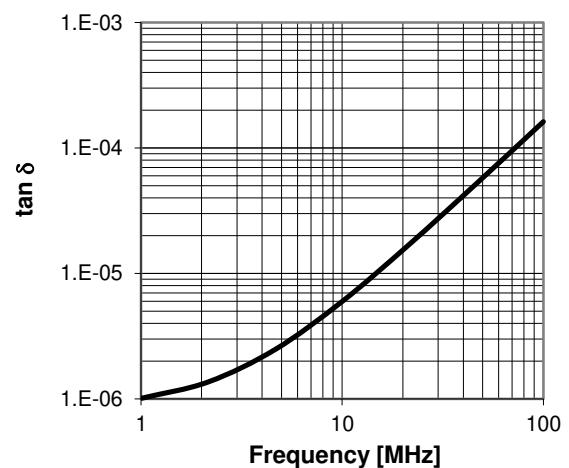
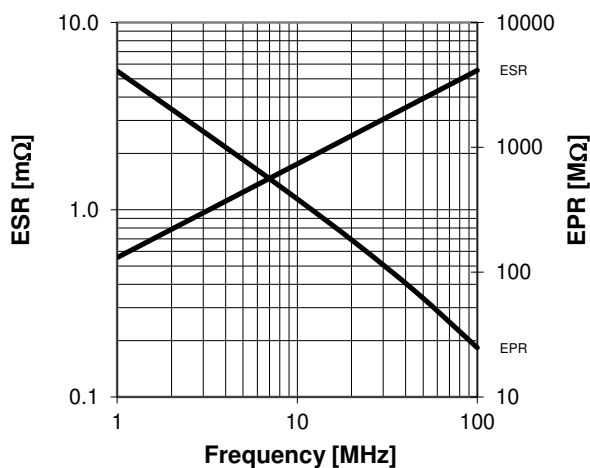
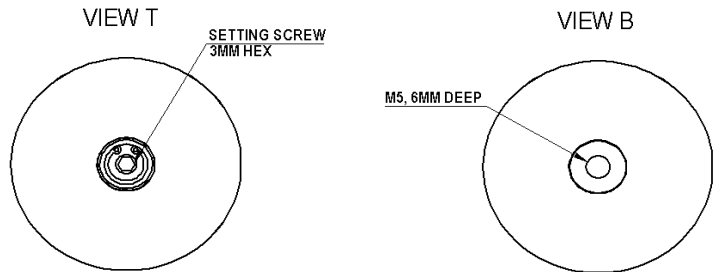
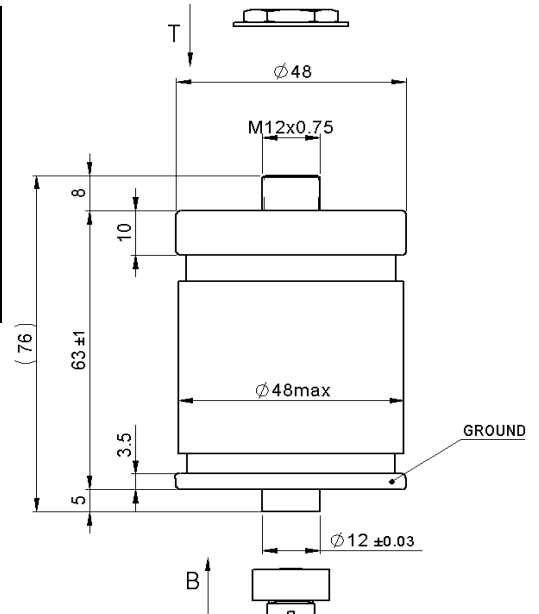


CTMN-41DAC/30-VK

Specifications	
Capacitance C_{max} (nominal)	46 pF
Capacitance C_{min} (nominal)	36 pF
Voltage (Peak Test U_{pt} / Peak Working U_{pw})	30 kV / 18 kV
Max. Current I_{max} at 13.56 MHz with	49 Arms
Conduction Cooling	20 W
Capacitance per turn	3 pF
Net Weight	0.5 kg
Torque	<0.2 Nm

I_{max} at 25°C ambient and 125°C surface temp. for convection and conduction (20W) cooling

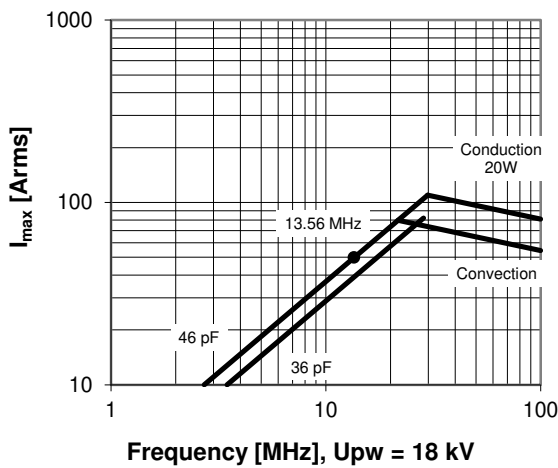

Special Features:
RoHS Compliant

Subject to change without prior notice

Note: Technical information in Service Bulletin SB-52 must be considered